

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
**WO 2004/043011 A1**

- (51) International Patent Classification<sup>7</sup>: **H04L 12/42**, 29/06
- (21) International Application Number:  
PCT/CN2002/000792
- (22) International Filing Date:  
6 November 2002 (06.11.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **WUHAN FIBERHOME NETWORKS CO., LTD.** [CN/CN]; 88 Youkeyuan Lu., Hongshan District, Wuhan City, Hubei 430074 (CN).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **YU, Shaohua** [CN/CN]; 88 Youkeyuan Lu, Hongshan District, Wuhan City, Hubei 430074 (CN).
- (74) Agent: **LIU, SHEN & ASSOCIATES**; A0601, Huibin Building No. 8, Beichen Dong Street, Chaoyang District, Beijing 100101 (CN).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **MULTIPLE SERVICE RING OF N-RINGLET STRUCTURE BASED ON MULTIPLE FE, GE AND 10GE**

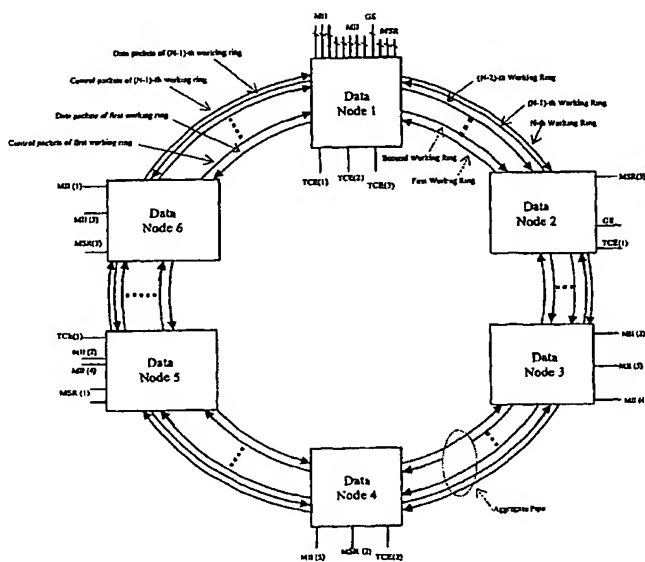

The Topology of Multiple Services Ring

(57) Abstract: The present invention presents Link Encapsulation Protocol (LEP) used to Multiple Services Ring (MSR) based on FE/GE/10GE aggregates in the way of pre-plan and connection based. LEP is provided for specific use on a N-ring structure (N=1, 2, 3, 4, 5, ...) consisting of the unidirectional (N-M) ringlets and M (1≤M

WO 2004/043011 A1

WO 2004/043011

PCT/CN2002/000792

**Multiple Service Ring of N-ringlet structure based on multiple FE, GE and 10GE****Field of the invention**

- 5 The present invention relates to Link Encapsulation Protocol (LEP) used to Multiple Services Ring (MSR) based on FE/GE/10GE aggregates, specifically, relates to data transmission apparatus and method used in Multiple Service Ring of N-ringlet structure based on multiple FE, GE and 10GE.

**Background art**

- 10 The present invention is further improvement related to MSR after the two PCT international applications of the same applicant of PCT/CN02/00066 filed on February 6, 2002 and PCT/CN02/00503 filed on July 17, 2002. Therefore, the contents of the two previous applications are incorporated in the present application.

- 15 The expansion of business and personal use of data network services are driving the need to deploy data services infrastructure facilities with connection oriented and pre-plan method. The dynamic bandwidth allocation and differentiated services over an aggregate pipe, tributary based bandwidth management, security function, protection, multicast, performance monitoring and their applications in the different topologies are the basic requirements of carrier class. Therefore, the development of MSR data network, LEP and related application in this Patent needs at least to provide the following capabilities:
- 20

- (1) The protocol encapsulation and transport of G.702 PDH circuit -- Synchronous and asynchronous circuit transport, Video signal, Voiceband signal, Digital channel supported by 64 kbit/s-based ISDN etc over a two-fibre ring, a single fibre ring, a link-type and broadcast topology of fibres.
- 25

(2) Service (or tributary) based protection of 1+1, 1:1, and 1:N models within 50 ms.

(3) Service or tributary based multicast and station-based multicast and broadcast.

(4) Bandwidth limitation of service (or tributary) based with symmetry and asymmetry.

(5) Tributary merging with symmetry and asymmetry.

(6) Line-speed filtering of tributary based.

(7) Tributary based performance monitoring in 15-minute and 24-hour.

(8) Mirroring of tributary.

(9) Frame based transparent PPPoE and PPPoA transport from access to backbone along a MSR  
5 ring or other topologies, in order to simplify accounting mechanism (e.g. Radius), reduce  
maintenance work, and improve latency variation (compared to Layer 2 and Layer 3 switch) in  
Access network application.

### Summary of the invention

0 The object of the present invention is to provide a packet-based transport model to multiple services  
and multiple topologies for continuation and extension of ITU-T Recommendation X.85/Y.1321  
and X.86/Y.1323. Continued compatibility with all existing requirements and standards from ITU-T  
and other organizations is required.

To achieve the above object, the present invention provides a data transmission apparatus used in a  
5 multiple service ring including at least two nodes coupled to at least one aggregate pipe and at least  
one tributary, said apparatus comprising: a tributary RX framer coupled to a tributary for deframing  
data frames received from said tributary and extracting a destination node address; a TX framer for  
encapsulating the destination node address and the data received from the tributary into frames of  
the multiple service ring and transmitting the same along an aggregate pipe to a downstream  
1) neighbor node in the ring; a RX framer for receiving and deframing data frames of the multiple  
service ring from a upstream neighbor node along an aggregate pipe to obtain at least a destination  
node address and actual data; filtering means for determining data frames for local node according  
to the destination node address, and forwarding the other frames to said TX framer so as to forward  
the other frames to a next node; a tributary TX framer for encapsulating said data frames for local  
5 node into tributary data frames and sending the tributary data frames to a corresponding tributary.  
Each aggregate pipe may comprise a N-ring structure consisting of N-M unidirectional ringlets and  
M unidirectional counter-rotating ringlets, where N and M are integers and  $1 \leq M < N$ . And said  
apparatus further comprises a ring management unit for controlling the use of the ringlets in one  
aggregate pipe, including assigning a specific (n-1)-th ringlet for transporting data packets in said

(n-1)-th ringlet in unidirectional direction and a n-th ringlet for transporting control packets in said n-th ringlet in the opposite direction. where  $1 < n \leq N$ .

The present invention further provides a data transmission method used in a multiple service ring including at least two nodes coupled to at least one aggregate pipe and at least one tributary, said method comprising the steps of: for data frames from a tributary: receiving and deframing data frames from said tributary and extracting a destination node address; and encapsulating the destination node address and the data received from the tributary into frames of the multiple service ring and transmitting the same along an aggregate pipe to a downstream neighbor node in the ring; and for data frames from an upstream neighbor node along an aggregate pipe: receiving and deframing data frames of the multiple service ring from the upstream neighbor node along the aggregate pipe to obtain at least a destination node address and actual data; determining data frames for local node according to the destination node address, and forwarding the other frames to a next node; and encapsulating said data frames for local node into tributary data frames and sending the tributary data frames to a corresponding tributary. Each aggregate pipe may comprise a N-ring structure consisting of N-M unidirectional ringlets and M unidirectional counter-rotating ringlets, where N and M are integers and  $1 \leq M < N$ . The data transmission method may further comprise the step of controlling the use of the ringlets in one aggregate pipe, including assigning a specific (n-1)-th ringlet for transporting data packets in said (n-1)-th ringlet in unidirectional direction and a n-th ringlet for transporting control packets in said n-th ringlet in the opposite direction. where  $1 < n \leq N$ .

The present invention presents Link Encapsulation Protocol (LEP) used to Multiple Services Ring (MSR) based on FE/GE/10GE aggregates. LEP used to MSR is provided for specific use on a N-ring structure ( $N=1, 2, 4, 8, 16, 32, 64, 128 \dots$ ) consisting of the unidirectional (N-M) ringlets and M ( $1 \leq M < N$ ) unidirectional counter-rotating ringlets as illustrated in Figure 1. Normally, a specific (N-1) ringlet transports its data packets into (N-1)-ringlet in unidirectional direction and control packets into N-ringlet in the opposite direction. Analogically, a specific N- ringlet transports its data packets into N-ringlet in unidirectional direction and control packets into FWR in the opposite direction (if N is even) or in the same direction (if N is odd). Similarly, N-ringlet as a control channel of (N-1)-ringlet is also set default to protection channel of (N-1)-ringlet in the case of fibre facility failure or signal degradation of (N-1)-ringlet. In the case of fibre facility failure or signal degradation, tributary services over N-ring structure are protected automatically each other



within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node. Architecturally, single-ring, the link, broadcast and pseudo-mesh topologies are supported also. Primary optical transport mechanism is defined to leverage FE/GE/10GE as an aggregate pipe. The applications used to LEP are defined to support tributary transparent transport with various existing data networks and services (e. g. DVB, FR, ATM, ISDN, DDN, G.702 etc), tributary based bandwidth management with symmetry and asymmetry (e.g. bandwidth limitation and tributary merging), tributary based 1+1, 1:1 and 1:N protection within 50 ms, tributary based multicast of service, tributary based security application (e.g. line-speed filtering), tributary based performance monitoring in the 15-minute and 24-hour, and is also defined to support forwarding of the MSR data link frames (also being a tributary) similar to functionality found in a more complex routing data system. LEP is connection based and pre-plan solution, tributary bandwidth is programmable by network management system, or initiated by end user according to customer needs and payment. The way of the bandwidth allocation is changed from the fixed to dynamic. This patent is a continuation and extension of multiple services transport platform or multiple services provisioning platform (one method is described in ITU-T Recommendation X.85/Y.1321 and X.86/Y.1323) to multiple topologies and multiple services transport of packet based.

#### **Brief description of the drawings:**

Fig.1 illustrates the Topology of Multiple Services Ring according to one embodiment of the invention;

Fig. 2 illustrates Tx and Rx Function Diagram of MSR Data Node according to one embodiment of the invention;

Fig. 3 is Generic Protocol Stack of MSR according to the present invention;

Fig. 4 is Protocol Stack of IP over LEP in GE and 10GE based Aggregate Pipe according to the invention, it will be used to Layer 3 forwarding packet;

Fig. 5 illustrates Generic Frame Format of MSR for the working ring according to one embodiment of the invention;;

Fig. 6 illustrates Generic Format of CS & NM Frames according to one embodiment of the invention;

Fig. 7 is expressions of TNID and TCCR ID according to the invention;

Fig. 8 illustrates the TDM Service Channel along MSR according to the invention;

Fig. 9 shows The TDM Service Channel over Bit FE/GE/10GE according to the invention;

Fig. 10 shows expressions of 1+1 and 1:1 tributary protection parameters according to the invention;

5 Fig. 11 shows EXPRESSIONS OF 1:N TRIBUTARY PROTECTION PARAMETER ACCORDING TO THE INVENTION;

Fig. 12 is the Single Fibre Ring of MSR according to the ;another embodiment of the invention;

Fig. 13 shows A MSR Topology, Link-type with Adding and Dropping Tributary Services according to the invention;

0 Fig. 14 shows a MSR Topology, Broadcast Connection to DVB Application according to the present invention;

Fig. 15 shows a MSR Topology, Pseudo-mesh Connection according the invention;

Fig. 16 shows the Physical Architecture of a MSR node (Out-of-band CS&NM Bus) according to one embodiment according to the present invention;

5 Fig. 17 is the Physical Architecture of a MSR node (in-band CS&NM Bus) according to one embodiment of the invention;

Fig. 18 is Layout of system equipment of a MSR node according to one embodiment of the invention.

## 0 Detailed description of the preferred embodiments

The key words related to the invention are given as follows: N-ringlet structure, aggregate, FE, GE, 10GE, tributary, TDM Circuit Emulation, bandwidth management, 1+1, 1:1 and 1:N protection within 50 ms, multicast of service, packet based performance monitoring, single-ring, the link, broadcast and pseudo-mesh topologies, line-speed filtering

5

### 1 Scope

This Patent presents Link Encapsulation Protocol (LEP) used to Multiple Services Ring (MSR)

based on FE/GE/10GE aggregates in the way of pre-plan and connection based. LEP is provided for specific use on a N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ) consisting of the unidirectional ( $N-M$ ) ringlets and  $M$  ( $1 \leq M < N$ ) unidirectional counter-rotating ringlets as illustrated in Figure 1. It is recommended that  $N=4, 8, 16, 32, 64, 128, \dots$ . Normally, a specific ( $N-1$ ) ringlet transports its data packets into ( $N-1$ )-ringlet in unidirectional direction and control packets into N-ringlet in the opposite direction. Analogically, a specific N- ringlet transports its data packets into N-ringlet in unidirectional direction and control packets into FWR in the opposite direction (if N is even) or in the same direction (if N is odd). Similarly, N-ringlet as a control channel of ( $N-1$ )-ringlet is also set default to protection channel of ( $N-1$ )-ringlet in the case of fibre facility failure or signal

degradation of ( $N-1$ )-ringlet. In the case of fibre facility failure or signal degradation, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node. Architecturally, single-ring, the link, broadcast and pseudo-mesh topologies are supported also. The service tributary interfaces of MSR node are defined to support TDM Circuit Emulation. LEP supports tributary based 1+1, 1:1 and 1:N protection within 50 ms, and tributary based multicast, tributary bandwidth limitation with symmetry and asymmetry, tributary merging, tributary Line-Speed Filtering of packet, tributary Mirroring, tributary performance monitoring in the 15-minute and 24-hour and is also defined to support forwarding of the MSR data link frame (also being a tributary) similar to functionality found in a more complex routing data system. MSR-LEP provides a packet-based transport model to multiple services and multiple topologies for continuation and extension of ITU-T Recommendation X.85/Y.1321 and X.86/Y.1323.

This patent will be used to Metro Area Network, concentrator of telecom and datacom, enterprise and campus network, and other private network. The related network may not or may interface to coarse wavelength division multiplex (CWDM) or dense wavelength division multiplex (DWDM) equipments.

## 2 References

The following ITU-T Recommendations, and other references contain provisions which, through reference in this text, constitute provisions of this patent. At the time of publication, the editions indicated were valid. All references are subject to revision: all users of this patent are therefore

encouraged to investigate the possibility of applying the most recent edition of the references and listed below.

## 2.1 ITU-T Recommendations

- [1] ITU-T Recommendation X.85/Y.1321, IP over SDH using LAPS.
- 5 [2] ITU-T Recommendation X.86/Y.1323, Ethernet over LAPS.
- [3] ITU-T Recommendation X.211 (1995) | ISO/IEC 10022 (1996), Information technology - Open Systems Interconnection - Physical service definition.
- [4] ITU-T Recommendation X.212 (1995) | ISO/IEC 8886 (1996), Information technology - Open Systems Interconnection - Data link service definition.
- 0 [5] ITU-T Recommendation X.200 (1994) | ISO/IEC 7498-1 (1994), Information technology - Open System Interconnection - Basic reference model: The basic model.
- [6] ITU-T Recommendation I.363.1 (1996), B-ISDN ATM Adaptation Layer specification: Type 1 AAL

## 2.2 IEEE Specifications

- 5 [7] IEEE 802.3 CSMA/CD Access Method and Physical Layer Specifications, 2002 Edition.

## 3 Definitions

For the purposes of this patent, the following definitions apply:

- 3.1 Aggregate Pipe: a physical connection of two adjacent nodes. Aggregate pipe is a channel of FE/GE/10GE. It is recommended that the same bandwidth of Aggregate Pipe in different span  
 ) along the same ring be used. Aggregate pipe can be 10/100Mb/s auto-sense Ethernet, Fast Ethernet, Gigabit Ethernet, 10 gigabit Ethernet (10GBASE-R, 10GBASE-W, 10GBASE-X).
- 3.2 Control Signalling Frame: a frame used to tributary connection establishment, topology discovery, Layer 2 protection switching of manual switch or forced switch etc in a node.
- 3.3 CT\_Request Frame: a frame used to send a configuration table request from Node A to  
 5 Node B along a MSR ring.

3.4 CT\_Response Frame: a frame used to send a configuration table response from Node B to Node A along a MSR ring.

3.5 Configuration Table (CT): a mapping table reflecting the actual value of TT and TN in a node and TCCR between nodes on the MSR ring during engineering operation or project  
5 installation phase.

3.6 Configuration Table Inquiry (CTI): a function to get CT from a node. CT\_Request frame with a CTI parameter reflecting changing part of TCCR of a node on MSR ring is sent to other nodes (called one of them as Node B) by unicast/multicast/broadcast mode from a node (called Node A, e.g. Central station in the most case) by network management interface during normal  
0 engineering operation or project installation phase. All nodes received CT\_Request frame with a CTI parameter will give a point-to-point response by CT\_Response frame with a CTI parameter reflecting actual configuration table of the local node on MSR ring to Node A.

3.7 Configuration Updating Table (CUT): a mapping table reflecting the available value modification of TT and TN in a node and TCCR between nodes on the MSR ring during  
5 engineering operation or project installation phase. The incorrect ICT will lead to fault of Tributary on MSR ring. CT\_Request frame with an CUT parameter reflecting changed part of TCCR of all node on MSR ring is sent to other nodes by broadcast mode from a node (e.g. Central station in the most case) by network management interface during normal engineering operation or project installation phase. All nodes received CT\_Request frame will build corresponding mapping  
0 relations of TCCR in the local node and give a point-to-point response by CT\_Response frame to that node sending CT\_Request frame. After getting CT-Response frame, that node sourcing CT\_Request frame issues a CT\_Confirm frame to that remote node sending CT\_Response frame.

3.8 First Working Ring (FWR): a first outer ring of N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ). Normally, it is ringlet and both data and control packets are sent in one direction. In the case of  
5 NWR fibre facility or node failure, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node.

3.9 Forced Switch: operator does by network management or software debug facility, perform L2PS on the target span. Operational priority is higher than Manual Switching.

3.10 FWR-Fibre-Cut: a parameter of L2PS\_Request Frame, used to stand for status indication of single fibre cut on FWR.

3.11 Initial Configuration Table (ICT): a mapping table reflecting the initial and available value of TT and TN in a node and TCCR between nodes on the MSR ring during engineering installation or project installation phase. The ICT must be pre-installed before MSR engineering operation or project installation phase. The incorrect ICT will lead to fault of Tributary services on MSR ring. CT\_Request frame with an ICT parameter reflecting initial TCCR of all nodes on MSR ring is sent to other nodes by broadcast mode from a node (e.g. Central station in the most case) by network management interface during initial engineering operation or project installation phase. All nodes received CT\_Request frame will build corresponding mapping relations of TCCR in the local node and give a point-to-point response by CT\_Response frame to that node sending CT\_Request frame. After getting CT-Response frame, that node sourcing CT\_Request frame issues a CT\_Confirm frame to that remote node sending CT\_Response frame.

3.12 L2 Protection Switching (L2PS): a powerful self-healing feature that allows to recovery from fibre facility or node failure within 50ms. Analogous to the K1/K2 protocol mechanism that SONET/SDH ring does. L2PS entity in a node detects link status. If neither Inter-frame Gap of MAC nor MAC frame is received by a node in Rx direction within 20ms (its value is programmable) from aggregate pipe, or if fibre facility or a node is failure (e.g. PSD or PSF), two nodes on failure span will enter L2PS State. This function is only used in the case of MSR ring (dual ring).

3.13 Layer 3 Forwarding Packet: a packet used to forward data packet in a node. This packet is different from those packets of reaching a Tributary in a node, is also different from network management frames and control signalling frames. Logically, a node can be treated as a router of performing Layer 3 forwarding when a Layer 3 forwarding Packet is forwarded according to routing table and routing protocols of Ipv4/6 in a node from the node to other node along the MSR.

3.14 L2PS\_Request Frame: a frame used to send a Manual Switch or Forced Switch request from Node A to two adjacent nodes (Node B and C) of targeted span or to two adjacent nodes (Node B and C) of failure node.

3.15 L2PS State: If a node receives neither Inter-frame Gap of MAC nor MAC frame within 20ms (its value is programmable) from aggregate pipe, or if fibre facility or a node is failure (e.g.

PSD or PSF), two nodes on failure span will enter L2PS State, if the L2PS function is set. The L2PS function is set to off when a single ring, link or broadcast topology is applied.

When a node enters L2PS State, forwarding means that received frame from a side of node will be forwarded to same side of this node (that is, received frame from westward on FWR will be forwarded to westward on the counter-rotating N-th ring.). It does not look like a node in Normal State, forwarding means that received frame from westward on FWR will be forwarded to eastward on N-th ring.

3.16 Manual Switch: operator does by network management or software debugging facility; perform L2PS on the target span.

3.17 Multiple Services Ring (MSR): Fig.1 illustrates the Topology of Multiple Services Ring according to one embodiment of the invention.

A N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ) consisting of the unidirectional (N-M) ringlets and M ( $1 \leq M < N$ ) unidirectional counter-rotating ringlets as illustrated in Figure 1. Normally, a specific (N-1) ringlet transports its data packets into (N-1) ringlet in unidirectional direction and control packets into N ringlet in the opposite direction. In the case of fibre facility failure or signal degradation, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node. Architecturally, single-ring, the link, broadcast and pseudo-mesh topologies are supported also. Each node could add and drop one or more independent tributary. MSR supports multiple nodes transmit simultaneously and traffic engineering. A node can be inserted or removed online from the MSR ring while other protected services in the working channel will be operated normally without packet loss and service loss along a MSR ring in the case of one ring being set to standby of any other single ring.

3.18 MSR Broadcast: a frame transmitted from a node along MSR ring can be sent to all other nodes along MSR.

3.19 MSR Filter Unit: a filtering and checking function unit for NA and TTL. All frames reaching to the MSR filter Unit will be sent first to a buffer in the Node. The MSR data node will check frame TTL and NA and perform XOR function with local NA. This frame will be taken away if TTL is zero. If its NA is match, those frames reaching destination will not be sent to neighbour (except for multicast and broadcast frames) along the same single ring. Otherwise, those

mismatched frame will go to neighbour directly by schedule unit without any processing after decrementing TTL field.

3.20 MSR Multicast: a frame transmitted from a node can be sent to several different nodes along one Working Ring by using MSR-LEP.

5 3.21 MSR Data Node: a network node that has an eastward Rx, an eastward Tx, a westward Rx and a westward Tx Aggregate Pipe connections along MSR ring, and one or more adding and dropping independent tributaries. It also has functions of receiving, transmitting and forwarding of network management frame, control signalling and data frame in a Node. The different connection configuration is applied for the different topologies.

0 3.22 MSR-LEP: a data link protocol between MAC/TCE (or PPP/Ipv4/Ipv6) frame (or packet) and the physical layer of aggregate pipe, used to communication between different nodes on the MSR. The MSR-LEP does operate by sending both data frame and the associated network management/signalling frames in a single ring.

3.23 MSR-LEP Rx Processor: a set of functions used to MSR-LEP processing in Rx direction.  
5 It includes Rx Filter Unit, discrimination of multicast/broadcast, TT/TN value and other associated MSR-LEP protocol processing.

3.24 MSR-LEP Tx Processor: a set of functions used to MSR-LEP protocol processing in Tx direction. It includes Tx schedule unit, functions of determination of NA, TTL, TT, TN, FCS, multicast/broadcast. The other associated MSR-LEP protocol processing is also included.

0 3.25 MSR Schedule Unit: a control function for transmitted frame in a node according to the priority level of forwarded frames from upstream node, multicast/broadcast frames and transmitted frame from the local station. If there are several frames to be sent in a node at the same time, the schedule unit will check priority of frame and decide which frame will go first to the downstream along this ring.

5 3.26 N<sub>ct</sub>: a count of retransmission used to Configuration Table Operation. All nodes on a ring will wait to be assigned ICT during engineering installation phase. After issuing CT\_Request frame, Node A will automatically send CT\_Request frame again after retransmit Timer<sub>ct</sub> (it is programmable) if Node A does not receive corresponding CT\_Response frame. It is believed that Node B is not reachable after N times of retransmission (N<sub>ct</sub> is programmable also). N<sub>ct</sub> is also  
used by CUT operation.



3.27 Network Management Frame: a frame used to performance and fault monitoring, node configuration management etc along a MSR ring or other different topologies.

3.28 Node Address (NA): an address of Node Link on the MSR ring. NA is a local address and has local meaning only along the MSR ring or other different topologies. It contains 4 octets. Each bit (binary "0" or "1") corresponds to a node for any single ring. For example, the binary "00100000 00000000 00000000 00000000" stands for the 3<sup>rd</sup> Node Address (station), the binary "00000100 00000000 00000000 00000000" stands for the 6<sup>th</sup> Node Address (station) (refer to as Figure 1). You may also use binary "00000010 00000000 00000000 00000000" to stand for 7<sup>th</sup> Node Address of new insertion and the actual number location of the 7<sup>th</sup> Node Address may be corresponded to middle position between Station 1 and Station 2 shown in Figure 1 since the MSR supports online node insertion. All Node Address must be leftward alignment and be pre-installed by (NVRAM) before operation. The maximum node number of the MSR Ring is 32 (For implementation, people can use Ethernet MAC and Ipv4 address to perform external network management).

3.29 Normal State: a state used to describe a node that has normal Tx and Rx functions on MSR ring and does not work on L2PS State. In Normal State, forwarding means that received frame from upstream will be forwarded to downstream. This state is only used along a MSR ring.

3.30 N-th Working Ring (NWR): a single ring of N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ). Normally, it is ringlet or counter-rotating ringlet and both data and control packets are sent in one direction. In the case of (N-1)-th ring facility or node failure, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node.

3.31 N-ring Structure: a N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ) consisting of the unidirectional (N-M) ringlets and M ( $1 \leq M < N$ ) unidirectional counter-rotating ringlets as illustrated in Figure 1.

The value of N and M is dependent upon the need of application, capacity allocation and protection strategy. It can be configured to 1:N or M:N. Optionally, some ringlet uses GE, other uses 10GE. Normally, a specific (N-1) ringlet transports its data packets into (N-1)-ringlet in unidirectional direction and control packets into N-ringlet in the opposite direction. Analogically, a specific N-ringlet transports its data packets into N-ringlet in unidirectional direction and control packets into FWR in the opposite direction (if N is even) or in the same direction (if N is odd). Similarly, N-

ringlet as a control channel of (N-1)-ringlet is also set default to protection channel of (N-1)-ringlet in the case of fibre facility failure or signal degradation of (N-1)-ringlet. In the case of fibre facility failure or signal degradation, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node.

3.32 NWR-Fibre-Cut: a parameter of L2PS\_Request Frame, used to stand for status indication of single fibre cut on NWR.

3.33 Physical Signal Degrade (PSD): random or automatic, caused by a physical signal degrade (e.g. excessive block or bit error rate). Once it happens, L2PS will be applied on the failure span along a MSR ring.

3.34 Physical Signal Failure (PSF): random or automatic, caused by a physical signal failure (e.g. fibre facility failure). Once it happens, L2PS will be applied on the failure span along a MSR ring.

3.35 Reference Point G1: a reference point between Rx Framer and RX Filter. It stands for processing sink of 10GMAC/GMAC physical layer before aggregate XGMII/GMII/MII.

3.36 Reference Point G2: a reference point between Tx Framer and TX Schedule. It stands for processing source of 10GMAC/GMAC physical layer before aggregate XGMII/GMII/MII.

3.37 Reference Point T1: a reference point between Tributary Rx Framer and MSR-LEP processor. It stands for processing sink of MSR-LEP before encapsulation of physical tributary of TCE etc.

3.38 Reference Point T2: a reference point between Tributary Tx Framer and MSR-LEP processor. It stands for processing source of MSR-LEP after stripping of physical tributary of TCE etc.

3.39 Rx Framer: an abstract of physical framer of Aggregate Pipe at Rx side, it stands for a framer of FE/GE/10GE. If Aggregate Pipe is Gigabit Ethernet for example, the related rate and signal are GMII at the Reference Point G1.

3.40 Timer\_ct: a Timer of retransmission used to Configuration Table Operation. All nodes on a ring will wait to be assigned ICT during engineering installation or project installation phase. After issuing CT\_Request frame, Node A will automatically send CT\_Request frame again after

retransmission Timer\_ct (it is programmable) if Node A does not receive corresponding CT\_Response frame. It is believed that Node B is not reachable after N\_ct times of retransmission (N\_ct is programmable also). N\_ct is also used by CUT operation.

3.41 Timer\_WTR: a Timer used to prevent L2PS oscillation, the L2PS can wait Timer\_WTR period (its value is programmable) before MSR returns to Normal State. This Timer is used only when the L2PS function is set.

3.42 Tributary: an independent adding/dropping tributary (or service) channel over MAC frame of FE/GE/10GE (after packetizing) to/from the MSR data nodes, just like a series "Private Line or Private Circuit for Renting from Carrier". Tributary can be multi-service. The different tributary can be assigned to different priority.

3.43 Tributary Adaptation Function Unit: an adaptation function from/to various independent tributary type signals to/from reference point T1/T2. It has Tributary Adaptation Source Function and Tributary Adaptation Sink Function. Sink corresponds to reference point T1, source to reference point T2. This adaptation function can include the signal and rate transform, synchronous function between two sides.

3.44 Tributary Cross-connection Relationship (TCCR): a table reflecting Tributary cross-connection relationship of all nodes on MSR ring or other topologies. It is global table of MSR or other topologies, that is, source and sink connection relationship of all available tributaries.

3.45 Tributary Rx Framer: an abstract of physical framer of Tributary at Rx side, it stands for a framer of TCE framers. If tributary is TCM for example, the data at the Reference Point T1 is the payload of TCM frame.

3.46 Tributary Tx Framer: an abstract of physical framer of Tributary at Tx side, it stands for a framer of TCE.

3.47 Tributary Number (TN): a number of same type of Tributary Port on a node. This number is 7 if the 7th ISDN is provided in a node.

3.48 Tributary Type (TT): a type of an independent adding/dropping tributary channel to/from the MSR data nodes. This type can be TCE service.

3.49 Topology Discovery: A data link control function in the MSR-LEP, used to find out who is its neighbour and how many nodes are working on the MSR (to ensure transmitted frame must

be received by the same station, destination address of a frame is pointed to itself). Each station appends its NA as parameter to this Topology Discovery Frame by order, update the length of parameter and passes this frame to the neighbour along the MSR ring as shown in Table 6. It is not necessary to know what is mapping relationship between Node Address and the physical position.

- 5 Each node performs topology discovery function periodically (The value of Timer is programmable) by sending topology discovery frame on the first or second working ring. Topology Discovery uses a signalling format.

3.50 Time to Live: this 6-bit field is a hop-count that must decremented every time a node forwards a frame. The maximum number of nodes in a MSR ring described in the patent is 32. In  
0 the L2PS case, the total node space can be 64 nodes on a ring.

3.51 Tx Framer: an abstract of physical framer of Aggregate Pipe at Tx side, it stands for a framer of FE/GE/10GE.

3.52 Wait to Restore (WTR): random or automatic, activated after the node entered L2PS meets the restoration criteria once the condition of the PSF, PSD or fibre facility failure disappears. To  
5 prevent L2PS oscillation, the L2PS can waits Timer\_WTR period (its value is programmable) before MSR enters Normal State. This function is only used in the case of MSR ring (dual ring).

3.53 WTR\_Request Frame: a frame used to transition peer node at the failure span to Normal State from L2PS State. After the node entered L2PS meets the restoration criteria once the condition of the PSF, PSD or fibre facility failure disappears. To prevent L2PS oscillation, the  
0 L2PS entity can waits Timer\_WTR period (its value is programmable) to enter Normal State by using this frame. This function is only used in the case of MSR ring (dual ring).

## 4 Abbreviations

### 4.1 Abbreviations described in IEEE 802.3

This Patent makes use of the following abbreviations described in IEEE 802.3:

- 5 1) 10GE 10 Gigabit Ethernet
- 2) FE Fast Ethernet, including 10/100Mb/s auto-sense Ethernet
- 3) GE Gigabit Ethernet
- 4) LAN Local area network

- 5) MAC Media access control
- 6) MII Media Independent Interface
- 7) GMII Gigabit Media Independent Interface
- 8) XGMII 10 Gigabit Media Independent Interface

5 4.2 Abbreviations described in ITU-T I.321 and I.361

This Patent makes use of the following abbreviations described in ITU-T Recommendation:

- a) ATM Asynchronous Transfer Mode

4.3 Abbreviations described in ETSI

This Patent makes use of the following abbreviations described in ETSI Recommendation EN 300

0 429:

- a) DVB Digital Video Broadcast

4.4 Abbreviations described in this patent

- 1) FWR First Working Ring
- 2) CS&NM Control Signalling and Network Management
- 5 3) CT Configuration Table
- 4) CTI Configuration Table Inquiry
- 5) CUT Configuration Updating Table
- 6) CWDM Coarse Wavelength Division Multiplex
- 7) DL Data Link
- 3 8) DWDM Dense Wavelength Division Multiplex
- 9) ICT Initial Configuration Table
- 10) L2PS Layer 2 Protection Switch
- 11) LSFFU Line-Speed Filtering Function Unit
- 12) MAC Media Access Control
- 5 13) MDL Layer Management of Data Link
- 14) MSR Multiple Services Ring

15)	MSR LEP	Multiple Services Ring –Link Encapsulation Protocol
16)	NWR	N-th Working Ring
17)	(N-1)WR	(N-1)-th Working Ring
18)	(N-2)WR	(N-2)-th Working Ring
5 19)	PDU	Protocol Data Unit
20)	PSD	Physical Signal Degrade
21)	PSF	Physical Signal Failure
22)	NA	Node Address
23)	Rx	Receive data
0 24)	SDU	Service Data Unit
25)	ST	Source Tributary
26)	TBM	Tributary Based Multicast
27)	TBP	Tributary Based Protection
28)	TCCR	Tributary Cross-Connection Relationship
5 29)	TCE	TDM Circuit Emulation
30)	TDM	Time Division Multiplex
31)	TMG	Tributary Merging Group
32)	TTBP	TCE Tributary Based Protection
33)	TN	Tributary Number
0 34)	TT	Tributary Type
35)	Tx	Transmission data
36)	WTR	Wait to Restore

## 5 MSR Network Framework

### 5.1 Elements of Ring

5 MSR is a N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ) consisting of the unidirectional (N-M) ringlets and M ( $1 \leq M < N$ ) unidirectional counter-rotating ringlets as illustrated in Figure 1. Normally, a specific

(N-1) ringlet transports its data packets into (N-1) ringlet in unidirectional direction and control packets into N ringlet in the opposite direction. In the case of fibre facility failure or signal degradation, the node received loss of signal or signal degradation will notify the peer node at the failure span to switch the corresponding data and control packets to another count-rotating ringlet.

- 5 No wrapping function is used in this case. Architecturally, single-ring, the link, broadcast and pseudo-mesh topologies are supported also. Each node could add and drop one or more independent tributary (e.g. DVB port, also could transmit and receive layer 3 (Ipv4/Ipv6 packet) forwarding data packet (also being a tributary), control signalling frame and network management frame. MSR supports multicast and broadcast of these Tributary service and forwarding data packet. Aggregate
- 0 pipe can be FE/GE/10GE. A node can be inserted or removed online from the ring while other protected services will be operated normally without packet loss and service loss along a MSR ring in the case of one ring being set to standby of other.

## 5.2 Frame Types on a Ring and Multiple Services in Tributary

- 5 Each node has ability of adding and dropping one or more independent Tributary services defined in Table 1.

TABLE 1 – Types of multi-service in Tributary

Tributary types	Capabilities		
TCEs	Full duplex point-to-point	Multicast	Broadcast
<p>Note 1: The bandwidth of aggregate pipe depends on deployment service requirements, the aggregate Tributary bandwidth be half the aggregate pipe bandwidth to provide protection bandwidth availability where needed. Where services requirements allow the aggregate Tributary bandwidth can exceed the aggregate bandwidth.</p> <p>Note 2: Multicast is half duplex point-to-multipoint of node based, Broadcast is half duplex point of node based to all other points on a ring.</p>			

Transmitted and received frames on a ring have (1) frames of multi-service station by station, (2) layer 3 (Ipv4/Ipv6 packet) forwarding data packet (just like router), (3) control signalling frame and (4) network management frame described in Table 2, to show full capabilities of point-to-point, multicast and broadcast along a ring.

5

TABLE 2 – Frame types

Frame types	Capabilities		
	Point-to-point	Multicast	Broadcast
Frames of multi-service station by station	Point-to-point	Multicast	Broadcast
Layer 3 (Ipv4/Ipv6 packet) forwarding data packet (a node operates just like a router)	Point-to-point	Multicast	Broadcast
Control Signalling Frame	Point-to-point	Multicast	Broadcast
Network Management Frame	Point-to-point	Multicast	Broadcast

Fig. 2 illustrates Tx and Rx Function Diagram of MSR Data Node according to one embodiment of the invention;

### 0 5.3 Components of Data Node

A MSR data node is the system equipment that has an eastward Rx, eastward Tx, westward Rx and westward Tx Aggregate Pipe connections, and one or more adding and dropping independent Tributaries. A MSR data node also has functions of receiving, transmitting and forwarding of network management frame, control signalling and data frame in a Node. The corresponding  
5 change should be made as the different connection configuration is applied for the different topologies. The basic components of a MSR data node are as follows.

5.3.1 Aggregate Pipe: a physical connection of two adjacent nodes. Aggregate pipe is a channel of FE/GE/10GE. It is recommended that the same bandwidth of Aggregate Pipe in different span along the same ring be used.



5.3.2 Tributary: an independent adding/dropping tributary channel to/from the MSR data nodes, just like a series "Private Line or Private Circuit for Renting from Carrier". Tributary can be a G.702 ports. The different tributary can be assigned to different priority.

5.3.3 First Working Ring (FWR): a first outer ring of N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ).

5 Normally, it is ringlet and both data and control packets are sent in one direction. In the case of NWR fibre facility or node failure, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node.

5.3.4 N-th Working Ring (NWR): a single ring of N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ).

0 Normally, it is ringlet or counter-rotating ringlet and both data and control packets are sent in one direction. In the case of (N-1)-th ring facility or node failure, tributary services over N-ring structure are protected automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node.

5.3.5 N-ring Structure: a N-ring structure ( $N=1, 2, 3, 4, 5, \dots$ ) consisting of the unidirectional (N-M) ringlets and M ( $1 \leq M < N$ ) unidirectional counter-rotating ringlets as illustrated in Figure 1.

5 The value of N and M is dependent upon the need of application, capacity allocation and protection strategy. It can be configured to 1:N or M:(N-M) ( $M \leq N-M$ ). Optionally, some ringlet uses GE, other uses 10GE. Normally, a specific (N-1) ringlet transports its data packets into (N-1)-ringlet in unidirectional direction and control packets into N-ringlet in the opposite direction. Analogically, a  
0 specific N- ringlet transports its data packets into N-ringlet in unidirectional direction and control packets into FWR in the opposite direction (if N is even) or in the same direction (if N is odd). Similarly, N-ringlet as a control channel of (N-1)-ringlet is also set default to protection channel of (N-1)-ringlet in the case of fibre facility failure or signal degradation of (N-1)-ringlet. In the case of fibre facility failure or signal degradation, tributary services over N-ring structure are protected  
5 automatically each other within 50ms if the protection path from a ringlet to other counter-rotating ringlet is set in a node.

5.3.6 MSR filter Unit: a filtering and checking function unit for NA and TTL. All frames reaching to the MSR filter Unit will be sent first to a buffer in the Node. The MSR data node will check TTL and NA of a frame and perform XOR function with local NA. This frame will be taken  
) away if TTL is zero. If its NA is match, those frames reaching destination will not be sent to

neighbour (except for multicast and broadcast frames) along the same ring. Otherwise, those mismatched frame will go to neighbour directly by schedule unit without any processing after decrementing TTL field.

5 5.3.7 MSR Schedule Unit: a control function for transmitted frame in a node according to the priority level of forwarded frames from upstream station, multicast/broadcast frames and transmitted frame from the local station. If there are several frames to be sent in a node at the same time, the schedule unit will decide which frame will go first to the downstream along the ring.

5.3.8 Rx Framer: an abstract of physical framer of Aggregate Pipe at Rx side, it stands for a framer of GE and 10GE.

0 5.3.9 Tx Framer: an abstract of physical framer of Aggregate Pipe at Tx side, it stands for a framer of GE and 10GE.

5.3.10 Tributary Rx Framer: an abstract of physical framer of Tributary at Rx side, it stands for a framer of ISDN.

5 5.3.11 Tributary Tx Framer: an abstract of physical framer of Tributary at Tx side, it stands for a framer of ISDN.

#### 5.4 Reference Point in Data Node

The four different Reference Points are defined in a node.

5 5.4.1 Reference Point G1: a reference point between Rx Framer and RX Filter. It stands for processing sink of 10GMAC/GMAC physical layer before aggregate XGMII/GMII/MII.

5.4.2 Reference Point G2: a reference point between Tx Framer and TX Schedule. It stands for processing source of 10GMAC/GMAC physical layer before aggregate XGMII/GMII/MII.

5 5.4.3 Reference Point T1: a reference point between Tributary Rx Framer and MSR-LEP processor. It stands for processing sink of MSR-LEP before encapsulation of physical tributary of TCE etc.

5.4.4 Reference Point T2: a reference point between Tributary Tx Framer and MSR-LEP processor. It stands for processing source of MSR-LEP after stripping of physical tributary of TCE etc.

### 5.5 Data Flow of Tx and Rx to Tributary

Normally, a specific (N-1) ringlet transports its data packets into (N-1)-ringlet in unidirectional direction and control packets into N-ringlet in the opposite direction. Analogically, a specific N-ringlet transports its data packets into N-ringlet in unidirectional direction and control packets into (N-1)WR in the opposite direction (if N is even) or in the same direction (if N is odd). Similarly, N-ringlet as a control channel of (N-1)-ringlet is also set default to protection channel of (N-1)-ringlet in the case of fibre facility failure or signal degradation of (N-1)-ringlet.

#### 5.5.1 Rx direction: Rx frames entering a node at the Reference Point G1 are sent to Rx Filter

Unit after Rx framer is performed. Rx Filter Unit will check and filter TTL, FCS and NA of frame. All frames reaching to the MSR Filter Unit will be sent first to a buffer in the Node. The MSR Filter Unit will check TTL, FCS and NA of frame and perform XOR function with local NA. This frame will be taken away and discarded if TTL is zero or FCS is error.

If its NA is match, those frames reaching destination will not be sent to neighbour along the same ring (e.g. (N-1)WR). Otherwise, those mismatched frame will go to neighbour directly by schedule unit without any processing after decrementing TTL field.

If the received frame is multicast or broadcast frames, it will be sent first to Tx Schedule Unit to downstream node after decrementing TTL field, and it is copied to other buffer for further related processing in the local node at the same time.

After checked the aspects of TTL, NA and multicast/broadcast, a frame to reach destination is operated second procedure in the local node (station). That is, are TT and TN illegal? If yes, this frame will be discarded. If no, this will be transferred to the corresponding Tributary port, Layer 3 forwarding unit, control signalling unit or network management unit at the Reference Point T1 according its value of TT and TN.

5.5.2 Tx direction: Rx frames entering a Tx processor from a Tributary port, Layer 3 forwarding unit, control signalling unit or network management unit at the Reference Point T2, will got TTL, FCS, TT, TN values and multicast/broadcast requirement first, and then got NA value according to types and ports configuration of Tributary, Layer 3 forwarding packet, requirement of control signalling or requirement of network management. After that, these frames are sent to TX Schedule

Unit. There are three types input: multicast/broadcast frames from upstream from other node, point-

to-point frame for transferring from upstream and transmitted frame from local station. They are all gone into TX Schedule Unit. Schedule Unit will operate a control function for these transmitted frames in a node according to the priority level of these frames. If there are several frames to be sent in a node at the same time, the schedule unit will decide which frame will go first to the downstream along the ring. It is also possible to discard those frames of lower priority level during Tx burst period.

### 5.6 Operation of Layer 3 forwarding Packets

MSR data node can be used as a router to forward IP related packets to other node on MSR ring according to relationship between Ipv4/Ipv6 routing table and its NA/TT/TN while this node could provide Tributary port for renting just like private line or circuit. When MSR data node is taken a role of router, the control plane (e.g. operation of routing protocols), network management plane (e.g. Simple Network Management Protocol) and data plane of a router (MSR data node) will share the same logical channel corresponding to the value of NA, TT and TN along the ring. That is, the control signalling frames of a router (MSR data node) will be operated on the different channel from the control signalling frames of MSR ring itself.

### 5.7 Operation of Control Signalling Frames

#### 5.7.1 Operation of Topology Discovery Frame

##### 5.7.1.1 Operation of Topology Discovery Frame in normal state

Topology Discovery Frame is a control frame in the MSR-LEP, used to figure out who is its neighbour and how many nodes are been working on the MSR (to ensure transmitted frame must be received by same station sending Topology Discovery Frame, destination address of frame is pointed to itself). Periodically (Timer\_topology\_discovery defaults to 3 seconds and is programmable), each station (e.g. Node A) broadcasts Topology\_Discovery\_Request Frame with a Null parameter along all ringlets respectively. All stations (e.g. Node B) received Topology\_Discovery\_Request Frame give a response by Topology\_Discovery\_Response Frame with a local NA (e.g. NA of Node B) to that station (e.g. Node A). Node A appends received NA and TTL value to its Topology Address Library in Node A by order of stations after getting

Topology\_Discover\_Response frame. The order of stations along a ring is dependent on difference of TTL value. TTL value, state (Normal State or L2PS State) of Node B, Ring state (Normal State or L2PS State) and value of (N-1)WR/NWR are bound to NA of Node B together as a record of Topology Address Library in Node A. The maximum and minimum values of TTL in a record of (N-1)WR or NWR correspond to two adjacent neighbours of Node A. The records of Topology Address Library of (N-1)WR and NWR are operated separately.

The operation of topology discovery frame is valid and topology status in a node is refreshed if the same results are got after consecutive 3 times transmission of topology discovery frame. Otherwise, the previous record of topology status will be kept unchanged. The operation and record of (N-1)WR and NWR topology discovery in a node are performed separately.

#### 5.7.1.2 Operation of Topology Discovery Frame in the case of (N-1)WR Fibre Cut

The MSR-LEP does work by sending both data frame and the associated network management/control frames in (N-1)WR, sending both data frame and the associated network management /control frames in NWR and (N-2)WR also.

If single fibre is cut or PSF occurs on (N-1)WR from Node 2 to Node 1 in Figure 1 for example, Node 1 detects PSF on (N-1)WR. Node 1 and Node 2 enter L2PS state from Node 2 to Node 1 on (N-1)WR and an L2PS\_Event\_Report Frame is broadcasted to all stations in a ring. At this moment, data frame and the corresponding network management /control frames in NWR, Node 3, 4, 5 and 6 are kept in normal state as usually. Periodically (Timer\_topology\_discovery defaults to 3 seconds and is programmable), any station of Node 1, 2, 3, 4, 5 and 6 (e.g. Node C) broadcasts Topology\_Discovery\_Request Frame with a Null parameter along a (N-1)WR first. When and if it reaches Node 1 or Node 2, or transmitted from Node 1 to Node 2, the route of this Topology\_Discovery\_Request Frame will be changed to NWR in the opposite direction. If Node 2 and Node 1 along (N-1)WR are involved in L2PS state, TTL value of those nodes sending frame and not being in L2PS state on NWR should be double of that in normal state when a frame is sent from these nodes. All stations (e.g. Node D) received Topology\_Discovery\_Request Frame will issue a response by Topology\_Discovery\_Response Frame with a local NA (e.g. NA of Node D) to that station (e.g. Node C). Node C appends received NA and TTL value to its Topology Address Library in Node C by order of stations. The order of stations along a ring is dependent on difference of TTL value. TTL value, state (Normal State or L2PS State) of Node D, state of ring (Normal State

or L2PS State) and value of (N-1)WR/NWR are bound to NA of Node D together as a record of Topology Address Library in Node C. The maximum and minimum values of TTL in a record of (N-1)WR or NWR correspond to two neighbours of Node C. The records of Topology Address Library of NWR and (N-1)WR are operated separately.

#### 5 5.7.1.3 Operation of Topology Discovery Frame in the case of NWR Fibre Cut

If single fibre is cut or PSF occurs on NWR from Node 1 to Node 2 in Figure 1 for example, Node 2 detects PSF on NWR. Node 2 and Node 1 enter L2PS state from Node 1 to Node 2 on NWR and an L2PS\_Event\_Report Frame is broadcasted to all stations in a ring. At this moment, data frame and the corresponding network management /control frames in NWR, Node 3, 4, 5 and 6 are kept in normal state as usually. Periodically (Timer\_topology\_discovery defaults to 3 seconds and is programmable), any station of Node 1, 2, 3, 4, 5 and 6 (e.g. Node C) broadcasts Topology\_Discovery\_Request Frame with a Null parameter along a NWR first. When and if it reaches Node 1 or Node 2, or transmitted from Node 1 to Node 2, the route of this Topology\_Discovery\_Request Frame will be changed to (N-1)WR in the opposite direction. If the NWR span is involved in L2PS state, TTL value of those nodes sending frame and not being in L2PS state on NWR should be double of that in normal state when a frame is sent from these nodes. All stations (e.g. Node D) received Topology\_Discovery\_Request Frame give a response by Topology\_Discovery\_Response Frame with a local NA (e.g. NA of Node D) to that station (e.g. Node C). Node C appends received NA and TTL value to its Topology Address Library in Node C by order of stations. The order of stations along a ring is dependent on difference of TTL value. TTL value, state (Normal State or L2PS State) of Node D, state of ring (Normal State or L2PS State) and value of (N-1)WR/NWR are bound to NA of Node D together as a record of Topology Address Library in Node C. The maximum and minimum values of TTL in a record of (N-1)WR or NWR correspond to two neighbours of Node C. The records of Topology Address Library of NWR and (N-1)WR are operated separately.

#### 5.7.1.4 Operation of Topology Discovery Frame in the case of Bidirectional Fibre Cut

If bidirectional fibres are cut or PSF occurs on both (N-1)WR and NWR from Node 1 to Node 2 in Figure 1 for example, Node 1 and Node 2 detect PSF on NWR and (N-1)WR respectively. Node 1 and Node 2 enter L2PS state from Node 1 to Node 2 on (N-1)WR and from Node 2 to Node 1 on NWR, and an L2PS\_Event\_Report Frame is broadcasted to all stations in a ring. At this moment,

Node 3, 4, 5 and 6 are kept in normal state as usually. Periodically (Timer\_topology\_discovery defaults to 3 seconds and is programmable), any station of Node 1, 2, 3, 4, 5 and 6 (e.g. Node C) broadcasts Topology\_Discovery\_Request Frame with a Null parameter along both (N-1)WR and NWR. When and if it reaches Node 1 or Node 2, or transmitted from Node 1 to Node 2, or  
 5 transmitted from Node 2 to Node 1, the route of this Topology\_Discovery\_Request Frame will be changed from (N-1)WR to NWR or from NWR to (N-1)WR in the opposite direction. If both (N-1)WR and NWR spans are involved in L2PS state, TTL value of those nodes sending frame and not being in L2PS state on both (N-1)WR and NWR should be double of that in normal state when a frame is sent from these nodes. All stations (e.g. Node D) received Topology\_Discovery\_Request  
 0 Frame will issue a response by Topology\_Discovery\_Response Frame with a local NA (e.g. NA of Node D) to that station (e.g. Node C). Node C appends received NA and TTL value to its Topology Address Library in Node C by order of stations. The order of stations along a ring is dependent on difference of TTL value. TTL value, state (Normal State or L2PS State) of Node D, state of ring (Normal State or L2PS State) and value of (N-1)WR/NWR are bound to NA of Node D together as  
 5 a record of Topology Address Library in Node C. The maximum and minimum values of TTL in a record of (N-1)WR or NWR correspond to two neighbours of Node C. The records of Topology Address Library of NWR and (N-1)WR are operated separately.

#### 5.7.1.5 Operation of Topology Discovery Frame in the case of Bidirectional Failure on Both Sides of Node

0 If bidirectional Failure on Both Sides of Node 2 for example, Node 1 and Node 3 detect PSF on NWR and (N-1)WR respectively. Node 1 and Node 3 enter L2PS state from Node 1 to Node 3 on NWR and from Node 3 to Node 1 on (N-1)WR, and an L2PS\_Event\_Report Frame is broadcasted to all stations in a ring. At this moment, Node 4, 5 and 6 are kept in normal state as usually. Periodically (Timer\_topology\_discovery defaults to 3 seconds and is programmable), any station of  
 5 Node 1, 3, 4, 5 and 6 (e.g. Node C) broadcasts Topology\_Discovery\_Request Frame with a Null parameter along both (N-1)WR and NWR. When and if it reaches Node 1 or Node 3, or transmitted from Node 1 to Node 3, or transmitted from Node 3 to Node 1, the route of this  
 Topology\_Discovery\_Request Frame will be changed from (N-1)WR to NWR or from NWR to (N-1)WR in the opposite direction. If both (N-1)WR and NWR spans are involved in L2PS state, TTL  
 0 value of those nodes sending frame and not being in L2PS state on both (N-1)WR and NWR should be double of that in normal state when a frame is sent from these nodes. All stations (e.g. Node D)

received Topology\_Discovery\_Request Frame give a response by Topology\_Discovery\_Response Frame with a local NA (e.g. NA of Node D) to that station (e.g. Node C). Node C appends received NA and TTL value to its Topology Address Library in Node C by order of stations. The order of stations along a ring is dependent on difference of TTL value.

- 5 TTL value, state (Normal State or L2PS State) of Node D, state of ring (Normal State or L2PS State) and value of (N-1)WR/NWR are bound to NA of Node D together as a record of Topology Address Library in Node C. The maximum and minimum values of TTL in a record of (N-1)WR or NWR correspond to two neighbours of Node C. The records of Topology Address Library of NWR and (N-1)WR are operated separately.

#### 0 5.7.2 Operation of Manual Switch and Forced Switch Frames

- L2PS\_Request frame with a Manual\_Switch or Forced\_Switch parameter targeting one or two spans on MSR ring is sent to other nodes by unicast or multicast mode from a node (called Node A, e.g. Central station in the most case) by network management interface during initial engineering installation or engineering operation phase. All nodes (called Node B) received L2PS\_Request
- 5 frame will perform corresponding switching operation in the adjacent nodes (Node B and C) of targeted span and give a point-to-point response by L2PS\_Response frame with a parameter of Successful\_Switch or Unsuccessful\_Switch to Node A, and issues L2PS\_Event\_Report frame with a set parameters of Forced\_Switch/Manual\_Switch and L2PS-State to designated node (connected to Network management) and/or broadcasts to all stations in normal state in a ring. The successful
- 0 operation is performed if Node A receives two correct responses from both Node B and Node C. Otherwise, operation is unsuccessful.

#### 5.7.3 Operation of L2PS in the case of PSF/PSD and Node failure

##### 5.7.3.1 Operation of (N-1)WR Fibre Cut

- If single fibre is cut or PSF occurs on (N-1)WR from Node 2 to Node 1 in Figure 1 for example,
- 5 Node 1 detects PSF on (N-1)WR. That is, neither Inter-frame Gap of MAC nor MAC frame is received within 20ms (the values of T200 and N200 are programmable) in the (N-1)WR of shorter path. L2PS entity in a Node 1 will start L2PS function and perform following sub-functions:
- (1) Node 1 goes into L2PS State and passes L2PS\_Request Frame with a parameter of (N-1)WR\_Fibre\_Cut along shorter path of NWR to Node 2. After getting this frame, Node 2 enters
- 0 L2PS State also, and issues L2PS\_Event\_Report frame with a set parameters of



NWR\_Fibre\_Cut/(N-1)WR\_Fibre\_Cut, PSF/PSD and L2PS-State to designated node (connected to Network management in the most case) and/or broadcasts to all stations in normal state in a ring. In L2PS State, all frames from Node 2 to Node 1 along shorter path of (N-1)WR are switched to the longest path of NWR in opposite direction.

- 5 (2) When PSF on Node 1 clears, Node 1 goes to Normal State, and starts Timer\_WTR (it is programmable). Once Timer\_WTR expires, Node 1 sends WTR-Request Frame with a parameter of Successful\_WTR to Node 2 along both shorter path and the longest path at once. Node 2 goes back to Normal State from L2PS State after receiving this frame.

#### 5.7.3.2 Operation of NWR Fibre Cut

- 0 If single fibre is cut or PSF occurs on NWR from Node 1 to Node 2 in Figure 1 for example, Node 2 detects PSF on NWR. That is, neither Inter-frame Gap of MAC nor MAC frame is received within 20ms (its value is programmable) in the NWR of short path. L2PS entity in a Node 2 will start L2PS function and perform following sub-functions:

- (1) Node 2 goes into L2PS State and passes L2PS\_Request Frame with a parameter of NWR-Fibre-Cut along shorter path of (N-1)WR to Node 1. After getting this frame, Node 1 enters L2PS State also, and issues L2PS\_Event\_Report frame with a set parameters of NWR\_Fibre\_Cut/(N-1)WR\_Fibre\_Cut, PSF/PSD and L2PS-State to designated node (connected to Network management) and/or broadcasts to all stations in normal state in a ring. In L2PS State, all frames from Node 1 to Node 2 along shorter path of NWR are switched to the longest path of (N-1)WR in opposite direction.

- (2) When PSF on Node 2 clears, Node 2 goes to Normal State, and starts Timer\_WTR (it is programmable). Once Timer\_WTR expires, Node 2 sends WTR-Request Frame with a parameter of Successful\_WTR to Node 1 along both shorter path of NWR and the longest path of (N-1)WR at once. Node 1 goes back to Normal State from L2PS State after receiving this frame.

#### 5 5.7.3.3 Operation of Bidirectional Fibre Cut

- If bidirectional fibre is cut or PSF occurs on both (N-1)WR and NWR from Node 1 to Node 2 in Figure 1 for example, Node 1/Node 2 detects PSF on NWR/(N-1)WR. That is, neither Inter-frame Gap of MAC nor MAC frame is received within 20ms (its value is programmable) in both (N-1)WR and NWR of shorter path. L2PS entity in both Node 1 and Node 2 will start L2PS function and perform following sub-functions:

(1) Node 1/Node 2 goes into L2PS State itself and passes L2PS\_Request Frame with a parameter of NWR\_Fibre\_Cut/(N-1)WR\_Fibre\_Cut along the longest path of (N-1)WR/NWR to Node 2/Node

1. After getting this frame, both Node 2 and Node 1 enters L2PS State, and issues

L2PS\_Event\_Report frame with a set parameters of NWR\_Fibre\_Cut/(N-1)WR\_Fibre\_Cut,

5 PSF/PSD and L2PS-State to designated node (connected to Network management) and/or

broadcasts to all stations in normal state in a ring. In L2PS State, all frames from Node 1 to Node 2 or from Node 2 to Node 1 along shorter path of (N-1)WR/NWR are switched to the longest path of NWR/(N-1)WR in opposite direction.

(2) When PSF on Node 1 and Node 2 clears, Node 1 and Node 2 go to Normal State, and starts

0 Timer\_WTR (it is programmable). Once Timer\_WTR expires, Node 1/Node 2 sends WTR\_Request Frame with a parameter of Successful\_WTR to Node 2/Node 1 along the long path at once. Node 1/Node 2 goes back to Normal State from L2PS State after receiving this frame.

#### 5.7.3.4 Operation of Bidirectional Failure on Both Sides of Node

Bidirectional Failure on Both Sides of Node is complete node failure. If it is Node 2 in Figure 1 for

5 example, Node 1 and Node 3 detect PSF on both NWR and (N-1)WR. That is, neither Inter-frame Gap of MAC nor MAC frame is received within 20ms (its value is programmable) in both (N-1)WR and NWR of shorter path via Node 2. L2PS entity in both Node 1 and Node 3 will start L2PS function and perform following sub-functions:

(1) Node 1/Node 3 goes into L2PS State itself in both directions and passes L2PS\_Request Frame

0 with a parameter of NWR\_Fibre\_Cut/(N-1)WR\_Fibre\_Cut along the longest path of (N-

1)WR/NWR to Node 3/Node 1. After getting this frame, both Node 3 and Node 1 enters L2PS State in both directions, and issues L2PS\_Event\_Report frame with a set parameters of

NWR\_Fibre\_Cut/(N-1)WR\_Fibre\_Cut, PSF/PSD and L2PS-State to designated node (connected to Network management) and/or broadcasts to all stations in normal state in a ring. In L2PS State of

5 both directions, all frames from Node 1 to Node 3 or from Node 3 to Node 1 along shorter path of (N-1)WR/NWR are switched to the longest path of NWR/(N-1)WR in opposite direction.

(2) When PSF on Node 1 and Node 3 clears or Node 2 is restored, Node 1 and Node 3 go to Normal

State, and starts Timer\_WTR (it is programmable). Once Timer\_WTR expires, Node 1/Node 3 sends WTR-Request Frame with a parameter of Successful\_WTR to Node 3/Node 1 along the

longest path at once. Node 1/Node 3 goes back to Normal State from L2PS State after receiving this frame.

#### 5.7.3.5 Operation of Bidirectional Failure on One Side of Node

This case is the same as 5.7.3.3.

### 5 5.8 Operation of Network Management Frames

#### 5.8.1 Initial Configuration Table (ICT) Operation

ICT is a mapping table reflecting the initial and available value of TT and TN in a node and TCCR between nodes on the MSR ring during engineering installation. The ICT must be pre-installed before MSR engineering operation. The incorrect ICT will lead to fault of Tributary services on

- 0 MSR ring. CT\_Request frame with an ICT parameter reflecting initial TCCR of all nodes on MSR ring is sent to other nodes by broadcast mode from a node (called Node A, e.g. Central station in the most case) by network management interface during initial engineering operation period. All nodes (called Node B) received CT\_Request frame will build corresponding mapping relations of TCCR in the local node and give a point-to-point response by CT\_Response frame to Node A.

- 5 All nodes on a ring will wait to be assigned ICT during engineering installation period. After issuing CT\_Request frame, Node A will automatically send CT\_Request frame again after retransmit timer (it is programmable, named for Timer\_ct) if Node A does not receive corresponding CT\_Response frame. It is believed that Node B is not reachable after N\_ct times of retransmission (N\_ct is programmable also).

- ) If Node A has received a message of CT\_Response frame with a Null parameter from Node B either before CT retransmit expired or before N\_ct times of retransmission, it is believed that ICT operation for Node B is successful.

#### 5.8.2 Configuration Updating Table (CUT) Operation

CUT is a mapping table reflecting the available value modification of TT and TN in a node and

- 5 TCCR between nodes on the MSR ring during the engineering operation. The CUT is applied during MSR engineering operation. The incorrect CUT will lead to fault of Tributary on MSR ring. CT\_Request frame with a CUT parameter reflecting changed part of TCCR of all nodes on MSR ring is sent to other nodes (called one of them Node B) by broadcast mode from a node (called Node A, e.g. Central station in the most case) by network management interface during normal

engineering operation period. All nodes received CT\_Request frame will build corresponding mapping relations of TCCR in the local node and give a point-to-point response by CT\_Response frame to Node A.

5 After issuing CT\_Request frame, Node A will automatically send CT\_Request frame again after retransmit timer (it is programmable, named for Timer\_ct) if Node A does not receive corresponding CT\_Response frame. It is believed that Node B is not reachable after N\_ct times of retransmission (N\_ct is programmable also).

If Node A has received a message of CT\_Response frame with a Null parameter from Node B either before retransmitted CT expired or before N\_ct times of retransmission, it is believed that  
0 CUT operation for Node B is successful.

### 5.8.3 Configuration Table Inquiry (CTI) Operation

CT\_Request frame with a Null parameter is sent to other nodes (called one of them Node B) by unicast/multicast/broadcast mode from a node (called Node A, e.g. Central station in the most case) by network management interface during normal engineering operation period. All nodes received  
5 CT\_Request frame with a Null parameter will send a point-to-point response by CT\_Response frame with a CTI parameter reflecting actual configuration table of the local node on a MSR ring to Node A.

### 5.9 Fault Management

If a fault occurs, Fault\_Report frame with a fault parameter defined in 11.6 is sent to designated  
0 node (connected to network management interface). The network management entity can pass Fault\_Request Frame with a fault parameter defined in 11.6 from designated node to a targeted node. The targeted node issues Fault\_Response Frame with a fault parameter defined in 11.6 to designated node as a responding.

### 5.10 Performance Management

5 Once 15 minutes or 24 hours expired, each node in a ring will issue Performance\_Report frame with a performance parameter defined in 11.6 to designated node (connected to network management interface). The network management entity can pass Performance\_Request Frame with a performance parameter defined in 11.6 from designated node to a targeted node if needed

anytime. The targeted node responds by Performance\_Response Frame with a performance parameter defined in 11.6 to designated node.

## 6 The Protocol Framework of Aggregate Pipe

### 6.1 The protocol framework of GE and 10GE based Aggregate Pipe

The protocol framework of MSR-LEP is shown as Figure 3. This Patent treats MSR-LEP as an upper layer protocol of Ethernet MAC of point-to-point full-duplex mode. The use of control signals is not required. The self-synchronous scrambling/descrambling function is not applied during insertion/extraction into/from the MAC payload. Communication service facilities between MSR-LEP and MAC layer are accomplished by means of primitives (MAC-DATA request and MAC-DATA indication) according to the principle of ITU-T Recommendation X.211.

Specification of Primitives presents the interaction between MSR-LEP and MAC layer to invoke and provide a service, and presents the elements of primitives.

MSR-LEP is the data link protocol, which provides point-to-point transferring over FE/GE/10GE MAC frame. The establishment and disconnection of tributary service are accomplished by the associated control signalling (just like Soft Permanent Virtual Circuit) or network management frames. Communications between data link and the associated upper protocols are accomplished by means of primitives according to the principle of ITU-T Recommendation X.212.

The service facility of MSR-LEP provided to other upper protocols via SAP (Service Access Point) is the DL-UNACK- DATA request primitive with "User data" (data frame in Tributary and L3 forwarding portion or frame of CS & NM) and "Priority" parameter set in a node, and the DL-UNACK-DATA indication primitive with "User data" (data frame in Tributary and L3 forwarding part or frame of CS & NM) and "Priority" parameter from received frame. "User data" is the outgoing/incoming upper layer packet. The default maximum frame size of MSR-LEP shall be within the scope of 1500 octets after taking into account the overhead of LEP frame. Supporting the maximum frame size of Ipv6 jumbo payload needs to further study. The octet stuffing procedure will not be used in this case.

An invalid frame is a frame which:

- a) has fewer than sixteen octets within the MAC payload; or
- b) contains a FCS error; or
- c) contains a NA, U/M/B, TT or TN which are mismatched or not supported by the receiver.

Invalid frame shall be discarded without notification to the sender. But for the lost or duplicated frames of a tributary (including L3 forwarding packets), the results of performance monitoring should be reported to layer management entity and operated according to 11.6.

The connection management entity is used to monitor the link status of receiving the peer link frame. It is local matter only and has not any associated frame to be used between the two sides.

--After initialization (the defaults of T200 and N200 are set to 10 milliseconds and 3 respectively), the MSR-LEP entity enters the normal way of transmitter and receiver.

--If the timer T200 expires before any frame (including data/CS & NM frame and Inter-Frame Gap of Ethernet) is received, the MSR-LEP entity shall restart timer T200 and decrement the

retransmission counter N200.

--If timer T200 expires and retransmission counter N200 has been decremented to zero before any frame is received, the MSR-LEP entity shall indicate this to the local connection management entity by means of the MDL-ERROR indication primitive, and restart timer T200 and recover the value of N200.

--The value of T200 and N200 shall be configurable. The minimum unit configured of T200 and N200 is 5 milliseconds and 1 respectively.

Protocol stack of IP over FE/GE/10GE using MSR-LEP is shown in Figure 4. It will be used to Layer 3 forwarding packets. The reference point G1/G2 and T1/T2 is reflected in and is

corresponded to Figure 2 and section 5.4 also.

Fig. 3 is Generic Protocol Stack of MSR according to the present invention;

Fig. 4 is Protocol Stack of IP over LEP in GE and 10GE based Aggregate Pipe according to the invention, it will be used to Layer 3 forwarding packet;

## 6.2 Tributary Adaptation Function Unit

Tributary Adaptation Function Unit is an adaptation function from/to various independent tributary type signals to/from reference point T1/T2. It has Tributary Adaptation Source Function and Sink Function. The Sink corresponds to reference point T1, The Source to reference point T2. This

adaptation function includes the signal and rate transform, synchronous function between Tributary Rx/Tx Framer and tributary service interface.

## 7 Generic MSR Frame Format

- 5 Each MSR-LEP frame uses a fixed sized header. The generic frame format is shown in Figure 5. All binary numbers in the following descriptions are in Most Significant Bit to Least Significant Bit order, reading from left to right, then two-octet based from top to bottom. The octets are also transmitted from left to right; then two-octet based from top to bottom, unless otherwise indicated. The 32-bit FCS transmission order and computation method of MSR frame are required to use the  
0 convention described in RFC 1662.

Fig. 5 illustrates Generic Frame Format of MSR for the working ring according to one embodiment of the invention;;

The said fields are described below.

### 7.1 Destination Node Address

- 5 This 32-bit field is an address of Node Link on the MSR ring or other topologies defined in section 15. NA is a local address and has local meaning only along the MSR ring. It contains 4 octets. Each bit (binary "0" or "1") corresponds to a node. For example, the binary "00100000 00000000 00000000 00000000" stands for the 3<sup>rd</sup> Node Address (station), the binary "00000100 00000000 00000000 00000000" stands for the 6<sup>th</sup> Node Address (station) (refer to Figure 1). You may also  
0 use binary "00000010 00000000 00000000 00000000" to stand for 7<sup>th</sup> Node Address of new insertion and the actual number location of the 7<sup>th</sup> Node Address may be corresponded to middle position between Node 1 and Node 2 shown in Figure 1 since the MSR supports online node insertion or deletion. All Node Address must be leftward alignment and be pre-installed by (NVRAM) before engineering operation. The maximum node number of the MSR Ring is 32 (For  
5 implementation, people can use Ethernet MAC and Ipv4/Ipv6 address to perform external network management).

### 7.2 Time to Live

This 5-bit field is a count of hops that must be decremented every time of forwarding a frame from a node on MSR ring or other topologies defined in section 15.



### 7.3 (N-1)WR/NWR Field for the working ring

This single bit field indicates on which ring this frame is assigned to run. "0" and "1" stand for (N-1)WR for working ring and NWR indicated for protection respectively. If NWR is the working ring, "0" and "1" stand for NWR for working and FWR indicated for protection respectively.

### 5 7.4 U/M/B Field

The U/M/B stands for Unicast/Multicast/Broadcast of node based. This 2-bit field is defined as Table 3.

TABLE 3 – Codes of U/M/B field

U/M/B	Codes
Reserved	00
Unicast	01
Multicast	10
Broadcast	11

0

5

0

5

### 7.5 Priority Field

This 3-bit field reflects priority level of MSR-LEP frame from 0 to 7. The value of priority is determined by manual setting of configuration via network management interface before engineering installation according to Service Level Agreement from carrier at the Tx side in a node.

- 5 The larger the value is, the higher the priority is. It may also be modified online during service operation by using CT\_Request and CT\_Response frames.

### 7.6 Reserved Field

This 5-bit field is reserved for future use.

### 7.7 Tributary Type (TT) Field

- 0 This 16-bit field stands for a type of an independent adding/dropping tributary channel to/from the MSR (or other topologies) data nodes, Layer 3 forwarding packet, Control Signalling and Network management frame. Tributary channel can be various TCEs. Its codes are as follows (see Table 4).

TABLE 4 – TT Codes

Tributary types	Code
Reserved	00000000-00001000
G.702 PDH circuit -- Synchronous circuit transport	00001001
G.702 PDH circuit -- Asynchronous circuit 1.544Mbit/s	00001010
G.702 PDH circuit -- Asynchronous circuit 2.048Mbit/s	00001011
G.702 PDH circuit -- Asynchronous circuit 6.312Mbit/s	00001100
G.702 PDH circuit -- Asynchronous circuit 8.448Mbit/s	00001101
G.702 PDH circuit -- Asynchronous circuit 34.368Mbit/s	00001110
G.702 PDH circuit -- Asynchronous circuit 44.736Mbit/s	00001111
G.702 PDH circuit -- Synchronous circuit 1.544Mbit/s	00010000
G.702 PDH circuit -- Synchronous circuit 2.048Mbit/s	00010001
G.702 PDH circuit -- Synchronous circuit 6.312Mbit/s	00010010
G.702 PDH circuit -- Synchronous circuit 8.448Mbit/s	00010011
G.702 PDH circuit -- Synchronous circuit 34.368Mbit/s	00010100
G.702 PDH circuit -- Synchronous circuit 44.736Mbit/s	00010101
Reserved for other PDH or DSL specification	00010110-00010111
Video signal -- Distributive television services	00011000
Video signal -- Conversational services of bit rates higher than primary rates	00011001
Video signal -- Conversational services of p×64 kbit/s signals	00011010
Reserved for other Video signals	00011011-00011111
Voiceband signal -- 64 kbit/s A-law coded Recommendation G.711 signals	00100000

Voiceband signal -- 64 kbit/s $\mu$ -law coded Recommendation G.711 signals	00100001
Reserved for other Voiceband signals	00100010-100111
Digital channel supported by 64 kbit/s-based ISDN -- Transport of 64 kbit/s channel	00101000
Digital channel supported by 64 kbit/s-based ISDN -- Transport of 384, 1536 or 1920 kbit/s channel	00101001
Reserved for other TCEs	00101010-00101000
Reserved	00110100 - 00110101
L3 Forwarding Packet	00110110
CS & NM Frame	00110111
Other MSR Tributary for GE	00111000
Reserved	00111001-11111111
Node 1: The higher octet (left octet) of TT is default set to "00000000" and reserved for future use.	

### 7.8 Tributary Number (TN) Field

This 16-bit field is a number of same type of Tributary Port within a node. TN is 7 (Hex 0x0007) if the 7th ISDN or G.702 port is provided in front of panel in a node for example.

### 5 7.9 CS & NM Field

This 8-bit field is used to identify the types of control signalling and network management frame shown in Table 5 when TT is assigned to the value (Binary 00110111) of CS & NM frame. The FSN field is not used and set to Binary 00000000.

TABLE 5 -- Type of Control Signalling and Network Management Frame

CS&NM Frame Types	Code
-------------------	------

Reserved	00000000
Topology_Discovery_Request Frame	00000001
Topology_Discovery_Response Frame	00000010
L2PS_Request Frame	00000011
L2PS_Response Frame	00000100
L2PS_Event_Report	00000101
WTR_Request Frame	00000110
CT_Request Frame	00000111
CT_Response Frame	00001000
Fault_Report Frame	00001001
Fault_Inquiry_Request Frame	00001010
Fault_Inquiry_Response Frame	00001011
Performance_Report Frame	00001100
Performance_Inquiry_Request frame	00001101
Performance_Inquiry_Response frame	00001110
SYNCHRONIZATION Request	00001111
SYNCHRONIZATION Confirm	00010000
CONNECTION_Request frame	00010001
CONNECTION_Confirm frame	00010010
DISCONNECTION_Request frame	00010011
DISCONNECTION_Confirm frame	00010100
MDL_ERROR_Indication Request frame	00010101
L2PS_RECOVERY_EVENT_Report	00010110
Reserved	00010111-11111111

Node 1: Node\_SYNCHRONIZATION Request frame will have the highest priority of delivery and receiving for each station.

Node 2: The codes assignment of Tributary based protection, multicast, bandwidth policing, security and rate duplication is also shown in section 12, 13 and 14.

#### 7.10 Frame Sequence Number (FSN) Field

This 8-bit field is used to identify Frame Sequence Number (FSN) of TCE data frames or IP related L3 forwarding packets in numbered modulo  $N_{fsn}=64$  (default value,  $N_{fsn}$  is programmable and can be configured to 256 if application needs) from 0 to 63. The field is used to performance monitoring function for packet lost or duplicated of TCE based tributary. The related operation is given in section 11.3. The FSN field will be set to zero if the signalling control frames or network management frames are used.

##### 7.10.1 Processing in the transmit side

- 10 The DL provides a sequence count value and a DL indication associated with each frame in the transmit side. The count value applied to FSN field and starts with 0, it is incremented sequentially to 63 and numbered modulo is 64. When the data link frames carrying Tributary payloads traverse a MSR or other topologies, they may arrive destination station disorderly, or lost or duplicated one or more frames. Due to this reason, it is required that frames must be delivered in order.

##### 15 7.10.2 Processing in the receive side

The Data Link entity in the receive side must detect the lost or duplicated frames, and track the following status of dynamic data stream:

- Frame sequence number and count;
- Frame loss (if occur);
- 20 • Frame duplication (if occur).

There are two ways to solve the real-time processing problem, (1) try to reorder and sort into the correct order, or (2) drop those disordering frames, when disordering case occurred. In implementation, these two methods should be all supported. If method (1) does not meet reliability

transport and performance requirement still, the method (2) will be applied. Due to the limitation of native speed and acceptable delay of data link processing, this Patent does not support correction method for bit errors and frame losses. If the event of any lost or duplicated frame occurred, data link entity will report to the layer management entity by MDL-ERROR-Indication (see 11.3.2.2.3).

## 5 7.11 Payload

When Tributary or Node based Layer 3 Forwarding Packet is applied, payload field is used to encapsulate upper layer protocols listed in Table 4. Payload is octet-oriented and its size is variable. The default maximum frame size shall be capable of supporting an information field of 1 500 octets (at least) for both IPv4-based and IPv6-based applications (the support of jumbo payload needs to study further). Except for Tributary, the payload of Layer 3 forwarding packet, control signalling frame and network management is described below.

### 7.11.1 Node Layer 3 Forwarding Part

Layer 3 forwarding Packet is a packet used to forward data packet in a node. This packet is different from those packets of reaching a Tributary in a node, is also different from network management frames and control signalling frames. Logically, a MSR data node can be treated as a router of performing Layer 3 forwarding when a Layer 3 forwarding Packet is forwarded according to routing table and routing protocols of IPv4/IPv6 in a node from the node to other node along the MSR ring or other topologies.

### 20 7.11.2 Control Signalling and Network Management Part

Fig. 6 illustrates Generic Format of CS & NM Frames according to one embodiment of the invention;

The above arrangement of the specific fields can be adjusted or modified according to the scope of the invention. The above embodiments are only for example.

25

The MSR-LEP does work by sending both data frame and the associated network management/control frames in both (N-1)WR and NWR. Generic format of CS & NM Frames is shown in Figure 6. The difference of the parameter field indicates various control signalling and network management frames below. The first octet of parameters field is used to identify how many

parameters are used by CS & NM frame. Each parameter following 1<sup>st</sup> octet consists of type (or tag), length and value of parameter. If the total octet number of parameters field is not based on 4-octet, it is optional that the octets padding (Binary 00000000) may be used.

#### 7.11.2.1 Topology Discovery Frame

- 5 The initial TTL value should be the total number of actual working stations (or nodes) and is determined by provisioning during project installation. The operation of Topology\_Discovery\_Request and Topology\_Discovery\_Response Frame are shown in 5.7.1 and Table 6 gives a Null parameter. U/M/B field is set to broadcast and priority is 6 (prior to the highest).

10

Table 6 /X.msr – Parameter Type of Topology\_Discovery\_Request and  
Topology\_Discovery\_Response Frames

Parameter type	Value of Parameter Field
Null	Binary “00000001 00000000 00000000 00000000”

#### 7.11.2.2 Parameters of L2PS\_Request Frame

- 15 The First and Second Parameter Type of L2PS\_Request Frame has Forced Switch, PSF, PSD and Manual Switch. Its value is defined as Table 7 and Table 8. The corresponding operation can be got in 5.7.2 and 5.7.3.

Table 7 /X.msr – First Parameter Type of L2PS\_Request Frame

Parameter type	Value of Parameter Field
Forced_Switch	Binary “00000001 00000100 00000001 00000000”
PSF	Binary “00000001 00000011 00000001 00000000”
PSD	Binary “00000001 00000010 00000001 00000000”
Manual_Switch	Binary “00000001 00000001 00000001 00000000”



Table 8/X.msr – Second Parameter Type of L2PS\_Request Frame

Parameter type	Value of Parameter Field
FWR_Fibre_Cut	Binary “00000001 00000110 00000001 00000000”
NWR_Fibre_Cut	Binary “00000001 00000101 00000001 00000000”

### 5 7.11.2.3 Parameters of L2PS\_Response Frame

The Parameter Type of L2PS\_Request Frame has Successful\_Switch, or Unsuccessful\_Switch. Its value is defined as Table 9. The corresponding operation can be got in 5.7.3.

10 Table 9 – Parameter Type of L2PS\_Response Frame

Parameter type	Value of Parameter Field
Successful_Switch	Binary “00000001 00001000 00000001 00000000”
Unsuccessful_Switch	Binary “00000001 00000111 00000001 00000000”

### 7.11.2.4 Parameters of L2PS\_Event\_Report Frame

The Parameter Type of L2PS\_Event\_Report Frame has Successful\_Switch, or Unsuccessful\_Switch. Its value is defined as Table 10, Table 11 and Table 12. The corresponding  
 15 operation can be got in 5.7.3.

Table 10 – First Parameter Type of L2PS\_Event\_Report Frame

Parameter type	Value of Parameter Field
Forced Switch	Binary “00000001 00000100 00000001 00000000”

PSF	Binary "00000001 00000011 00000001 00000000"
PSD	Binary "00000001 00000010 00000001 00000000"
Manual Switch	Binary "00000001 00000001 00000001 00000000"

Table 11 – Second Parameter Type of L2PS\_Event\_Report Frame

Parameter type	Value of Parameter Field
(N-1)WR_Fibre_Cut	Binary "00000001 00000110 00000001 00000000"
NWR_Fibre_Cut	Binary "00000001 00000101 00000001 00000000"

5

Table 12 – Third Parameter Type of L2PS\_Event\_Report Frame

Parameter type	Value of Parameter Field
L2PS_State	Binary "00000001 00001010 00000001 00000000"
Normal_State	Binary "00000001 00001001 00000001 00000000"

## 7.11.2.5 Parameters of WTR\_Request Frame

10 The corresponding operation can be got in 5.7.3 and parameter is shown in Table 13.

Table 13 –Parameter Type of WTR\_Request Frame

Parameter type	Value of Parameter Field
Successful_WTR	Binary "00000001 00001011 00000001 00000000"

## 7.11.2.6 CT\_Request Frame

The code value of CT-Request Frame is binary "00000111". CT-Request Frame can be applied to point-to-point operation of Tributary based and node based, and also used to node based multicast/broadcast operation. For the Tributary based multicast/broadcast operation, please refer to as section 13 of this Patent. The major portion of CT is TCCR ID. A TCCR ID consists of  $TN_i$  ID (This is an identifier of Tributary p within node x), 2-bit U/M/B field, 14-bit length field (This field is used to represent the total number of Tributary  $TN_j$  ID following length field) and one or more  $TN_j$  ID (This is an identifier of Tributary q within node y). ID is a value of identifier,  $TN_i$ ,  $TN_j$ ,  $TN_k$  and  $TN_m$  are the  $i$ th Tributary Number of same TT of Node n, the  $j$ th Tributary Number of same TT of Node o, the  $k$ th Tributary Number of same TT of Node p and the  $m$ th Tributary Number of same TT of Node q. The values of n, o, p, q are 0 through 31, and stands for numbering of node. The values of i, j, k, l are 0 through  $2^{16}-1$ , and stands for tributary number with the same TT value.

Fig. 7 is expressions of TNID and TCCR ID according to the invention. In Fig.7,  $TN_i$  ID =  $NAX(x=1,2,3...32)+TT+TN_p$  ( $p=0,1,2,3,...2^{16}-1$ ), to identify the  $p$ th Tributary with the fixed TT and TN value within  $i$ th node. For the case of Multicast/Broadcast Mode, an tributary based outgoing packet within a source node can be multicast or broadcast to a designated or source tributary (ST) of other sink nodes along a MSR ring or other topologies. Each sink node should have only a source tributary to receive this packet from ringlet at a time. If a membership group of multicast or broadcast has been established within a sink node, the said ST will duplicate this packet to other tributaries with the same membership relation.

What the ICT, CUT and Null parameters indicate is three different operations: ICT, CUT and CTL. Its type and field are described below in Table 14.

Table 14 –Parameter Type of CT\_Request Frame

Parameter type	Parameter Field
ICT	Binary "00000001 00100000 +" octet number of parameter+"value of TCCR ID shown in Figure 7"
CUT	Binary "00000001 00100001 +" octet number of parameter+"value of TCCR ID shown in Figure 7"

Null	Binary "00000001 00100011 00000001 00000000"
------	--

#### 7.11.2.7 CT\_Response Frame

Null parameter in CT\_Response Frame is used by ICT and CUT operation. CTI parameter is

5 followed by CTI operation.

Table 15 –Parameter Type of CT\_Request Frame

Parameter type	Parameter Field
CTI	Binary "00000001 00100100 +" octet number of parameter"+"value of TCCR ID shown in Figure 7"
Null	Binary "00000001 00100011 00000001 00000000"

The corresponding operation can be got in 5.8 and parameter is shown in Table 15.

10

#### 7.11.2.8 Fault\_Report Frame

Table 16 –Parameter Type of Fault\_Report Frame

Parameter type	Parameter Field
PSF	Binary "00000001 00000011 00000001 00000000"
PSD	Binary "00000001 00000010 00000001 00000000"

The corresponding operation can be got in 5.9 and parameter is shown in Table 16.

15

#### 7.11.2.9 Parameter of Fault\_Inquiry\_Request Frame

Table 17 –Parameter Type of Fault\_Inquiry\_Request Frame

Parameter type	Parameter Field
Null	Binary "00000001 00100011 00000001 00000000"

The corresponding operation can be got in 5.9 and parameter is shown in Table 17.

#### 7.11.2.10 Parameter of Fault\_Inquiry\_Response Frame

5

Table 18 –Parameter Type of Fault\_Inquiry\_Request Frame

Parameter type	Parameter Field
PSF	Binary "00000001 00000011 00000001 00000000"
PSD	Binary "00000001 00000010 00000001 00000000"

The corresponding operation can be got in 5.9 and parameter is shown in Table 18.

#### 7.11.2.11 Parameter of Performance\_Report Frame

10

Table 19 –Parameter Type of Performance\_Report Frame

Parameter type	Parameter Field
A set of TNi in a node (designated)	Binary "00000001 01000000 +" octet number of parameter "+"value of TNi shown in Figure 7"
TNFCS_15m (Total Number of FCS error in 15 minutes, 4octets, 4octets length)	Binary "00000001 01000001 00000100 "value of TNFCS-15m shown in Figure 7"
TNPL_15m (Total Number of Frame Loss in 15 minutes, 4octets length)	Binary "00000001 01000001 00000100 "value of TNPL-15m shown in Figure 7"
TNFCS_24h (Total Number of	Binary "00000001 01000001 00000101 "value of TNFCS-24h

FCS error in 24 hours, 5octets length)	shown in Figure 7"
TNPL_24h (Total Number of Frame Loss in 24 hours, 5octets length)	Binary "00000001 01000001 00000101 "value of TNPL-24h shown in Figure 7"
TNFCS and TNPL represents two different registers reflected values of "Total Number of FCS error" and "Total Number of Frame Loss" respectively.	

The corresponding operation can be got in 5.10 and parameter is shown in Table 19.

#### 7.11.2.12 Parameter of Performance\_Inquiry\_Request Frame

5 Table 20 –Parameter Type of Performance\_Inquiry\_Request Frame

Parameter type	Parameter Field
A set of TNi in a node (designated)	Binary "00000001 01000000 +"octet number of parameter"+"value of TNi shown in Figure 7"

The corresponding operation can be got in 5.10 and parameter is shown in Table 20.

#### 7.11.2.13 Parameter of Performance\_Inquiry\_Response Frame

Table 21 –Parameter Type of Performance\_Inquiry\_Response Frame

Parameter type	Parameter Field
A set of TNi in a node (designated)	Binary "00000001 01000000 +" octet number of parameter"+"value of TNi shown in Figure 7"
TNFCS_15m (Total Number of FCS in 15 minutes, 4octets length)	Binary "00000001 01000001 00000100 "value of TNFCS-15m shown in Figure 7"
TNPL_15m (Total Number of	Binary "00000001 01000001 00000100 "value of TNPL-15m

Frame Loss in 15 minutes, 4octets length)	shown in Figure 7"
TNFCS_24h (Total Number of FCS in 24 hours, 5octets length)	Binary "00000001 01000001 00000101 "value of TNFCS-24h shown in Figure 7"
TNPL_24h (Total Number of Frame Loss in 24 hours, 5octets length)	Binary "00000001 01000001 00000101 "value of TNPL-24h shown in Figure 7"
TNFCS and TNPL represents two different registers reflected values of "Total Number of FCS error" and "Total Number of Frame Loss" respectively.	

The corresponding operation can be got in 5.10 and parameter is shown in Table 21.

#### 7.12 FCS

The Frame Check Sequence field defines as 32 bits (four octets). The FCS field is calculated over  
all bits of the Destination Node Address, Time to Live, U/M/B, Priority, TT, TN, CS & NM,  
payload (or associated parameters for CS & NM frames). Please refer to X.85/Y.1321 for the  
calculation of 32-bit FCS.

#### 8 Filter and schedule Function

- MSR filtering function is a filtering and checking facility for NA and TTL of a frame. All frames  
reaching to the MSR filter Unit will be sent first to a buffer in the Node. The MSR data node will  
check TTL and NA of a frame and perform XOR function with local NA. This frame will be taken  
away if TTL is zero. If its NA is match, those frames reaching destination will be processed by  
MSR-LEP processor and not be sent to neighbour (except for multicast and broadcast frames).  
Otherwise, those mismatched frame will go to neighbour directly by schedule unit along MSR ring  
or other topologies without any processing after decrementing TTL field. This is MSR filtering  
function.

MSR scheduling function is a set of functions used to MSR-LEP protocol processing in Tx direction. It includes Tx Schedule Unit, functions of determination of NA, TTL, TT, TN, FSN, FCS, multicast/broadcast according to types and port configuration of Tributary, a route of Layer 3 forwarding packet, requirement of control signalling or requirement of network management. The other associated MSR-LEP protocol processing is also covered.

## 9 Data Node insertion and Deletion

A data node can be inserted/removed online into/from the ring by using topology discovery (5.7.1) and L2PS (5.7.2 and 5.7.3) functions while other data nodes and services will be operated normally without frame loss and service loss on (N-1)-ringlet on condition that either NWR is protection channel of (N-1)WR.

## 10 Tributary Loopback

Once loopback function is set, a node provides local or remote data channel shortcut from Tx interface to Rx interface in Tributary.

## 11 TDM Circuit Emulation (TCE) over MSR

### 11.1 Introduction

This section provides a protocol model along MSR for TDM based bit-stream or octet-stream over MSR. Each station can have one or more TCEs as Tributary. TCE is operated end-to-end and is originated from the source station and terminated at the sinkstation. TCE can be operated in the way of half-duplex point-to-point, full-duplex point-to-point or half-duplex point-to-multipoint. The two TCE channels are shown in Figure 8.

Fig. 8 illustrates the TDM Service Channel along MSR according to the invention;



## 11.2 Protocol framework of TDM Circuit Emulation (TCE)

The protocol framework of TCE is involved in the underlying FE/GE/10GE aggregate pipe shown in Figure 9. The functions of encapsulation, real-time transport of order, detection of disorder and duplication, sorting, error report, primitives and related parameters, and timing synchronous processing etc are performed within the MSR-LEP.

Fig. 9 shows The TDM Service Channel over Bit FE/GE/10GE according to the invention;

## 11.3 Services provided by MSR Data link

### 11.3.1 Definitions

The layer services provided by MSR Data link to TCE layer are:

- Transfer of service data units with a constant source bit rate from TCE layer and the delivery of them with the same bit rate in MSR data link layer; and/or
- Transfer of timing information between source and destination; and/or
- Transfer of structure information between source and destination; and/or
- Indication of lost, duplicated or errored information that is not recovered by MSR data link if needed.

### 11.3.2 Primitives between DL and the DL user

#### 11.3.2.1 General

At the Service Access Point (SAP) of MSR DL, the following primitives is used between the MSR DL and the TCE layer:

- From a TCE layer to the MSR DL,  
DL-UNACK-DATA Request;
- From the MSR DL to the TCE layer,  
DL-UNACK-DATA Indication.
- From the MSR DL to the management entity;  
MDL-ERROR Indication.

A DL-UNACK-DATA request primitive at the local DL-SAP (Data Link – Service Access Point) will result in a DL-UNACK-DATA indication primitive at its peer DL-SAP.

### 11.3.2.2 Definition of Data Link Primitives

#### 11.3.2.2.1 DL-UNACK-DATA request (not be used to signalling frame)

5 DL-UNACK-DATA request (USERDATA [Necessary],  
STRUCTURE [optional])

The DL-UNACK-DATA request primitive requests the transfer of the DL-SDU (Data Link – Service Data Unit), i.e. contents of the USERDATA parameter, from the local DL entity to its peer entity. The length of the DL-SDU and the time interval between two consecutive primitives is  
10 constant. These two constants are a function of the DL service provided to the TCE layer.

#### 11.3.2.2.2 DL-UNACK-DATA indication (Does not have signalling frame)

DL-UNACK-DATA indication (USERDATA [Necessary],  
STRUCTURE [optional],  
ERROR [optional])

15 A DL user is notified by the DL that the DL-SDU, i.e. contents of the USERDATA parameter, from its peer is available. The length of the DL-SDU and the time interval between two consecutive primitives should be constant. These two constants are a function of the DL service provided to the TCE layer.

#### 11.3.2.2.3 MDL-ERROR indication

20 MDL-ERROR indication (T\_error [Necessary],  
REG\_lost [optional],  
REG\_duplicated [optional])

REG\_lost and REG\_duplicated parameters are used to identify how many sequence frames are lost and duplicated by FSN detection from the transmit side to receive side in the specific period  
25 (T\_error). Once sequence lost or duplicated is occurred, MDL-ERROR indication will be applied.

## 11.3.2.4 Definition of Primitive Parameters

## 11.3.2.4.1 USERDATA parameter

The USERDATA parameter carries the DL-SDU to be sent or delivered. The size of each block to be delivered depends on the specific DL layer service used. For the same type of TCE payload, i.e.

- 5 ITU-T G.702 PDH circuit, the payload length of DL-PDU is constant and default is set to 64bytes. For the supported TCE payloads, the payload length of DL-PDUs (Data Link – Protocol Data Unit) is defined as following.

TABLE 22 – Selection of Default Payload Length of DL-PDU

Types of TCE payload	Default Payload Length of DL-PDU (bytes)
G.702 PDH circuit -- Synchronous circuit transport	64
G.702 PDH circuit -- Asynchronous circuit transport	64
Video signal -- Distributive television services	188
Video signal -- Conversational services of bit rates higher than primary rates	188
Video signal -- Conversational services of $p \times 64$ kbit/s signals	188
Voiceband signal -- 64 kbit/s A-law or $\mu$ -law coded Recommendation G.711 signals	64
Digital channel supported by 64 kbit/s-based ISDN -- Transport of 64 kbit/s channel	64
Digital channel supported by 64 kbit/s-based ISDN -- Transport of 384, 1536 or 1920 kbit/s channel	64

#### 11.3.2.4.2 STRUCTURED parameter (option of DL-UNACK-DATA Primitive)

The STRUCTURED parameter can be used when the data stream of TCE layer to be transferred to the peer DL entity is organized into groups of bits. The length of the structured block is fixed for each instance of the DL service. The length is an integer multiple of 32 bits. An example of the use of this parameter is to support circuit mode bearer services of the 64 kbit/s-based ISDN. The two values of the STRUCTURED parameter are:

BOUND and

DATA-STREAM.

The value BOUND is used when the USERDATA is the first part of a structured block which can be composed of consecutive USERDATA. In other cases, the structure parameter is set to DATA-STREAM. The use of the STRUCTURED parameter depends on the type of DL service provided. The use of this parameter is agreed prior to or at the connection establishment by network management between the TCE layer and the DL layer. In most application, the function of "STRUCTURE parameter" has been covered by the transform and adaptation function of Tributary at the Tributary interface within a node since MSR-LEP uses pre-plan and connection oriented policy, and TCCR is made (e.g. ISDN 64kb/s Tributary source in a node to ISDN 64kb/s Tributary sink, E1 Tributary source in a node to E1 Tributary sink) by network management entity or control signalling before Tributary service is operated on-line.

#### 11.3.2.4.3 ERROR parameter (option of DL-UNACK-DATA Primitive)

The ERROR parameter is involved to identify that the USERDATA is errored or non-errored. The ERROR parameter has two values:

NO and

YES.

The "YES" value does imply that the USERDATA covers a dummy value within this frame. The "NO" value implies that the no error is found from transmit to receive side. The use of the ERROR parameter and the choice of dummy value depend on the type of DL service provided. The use of this parameter is agreed prior to or at the connection establishment of TCCR between the TCE layer and the DL layer.

#### 11.3.2.4.4 T\_error, REG\_lost and REG\_duplicated parameters

The connection management entity is used to monitor the error status of receiving the peer link frame at peer-to-peer level. It is local matter only and has not any associated frame to be used between the two sides.

- 5 REG\_lost and REG\_duplicated parameters are attached to MDL-ERROR Indication primitive to identify how many sequence frames are lost and/or duplicated from the transmit side to receive side in the specific period (T\_error). Their accumulation values are stored and transformed to the two specific registers in the receive side. The parameter T\_error in the unit of second is an initial value (15 minutes and 24 hours are two default values) and configurable by the network management
- 10 entity according to the rate of specific service over DL. Each Tributary has the corresponding REG\_lost and REG\_duplicated, and is separated operated from other Tributary. At the beginning of MSR Data Node start-up, the REG\_lost and REG\_duplicated of each Tributary are clear and set to zero.

- 15 --If the timer T\_error expires before no lost or duplicated frames are received, the link entity shall restart timer T\_error. The DL entity shall not indicate this to the local connection management entity.

--Once the timer T\_error expires if any lost or duplicated frame is received, the DL entity shall indicate this to the local connection management entity by means of the MDL-ERROR indication primitive, and restart timer T\_error.

#### 20 11.4 Supported Functions of MSR DL for TCE case

The following functions can be performed in the MSR DL in order to meet requirements of TDM timing, structure, jitter and wander:

- a) source clock frequency recovery at the receiver;
- b) recovery of the source data structure at the receiver;
- 25 c) blocking and deblocking of DL user information;
- d) control of frame latency variation;
- e) processing of lost or duplicated frames;

NOTE – For some DL users, the end-to-end QOS monitoring may be needed to provide. This function can be achieved by calculating a CRC, reporting lost or duplicated frames in the default period (e.g. 15 minutes and 24 hours) for the DL-PDU. A corresponding periodic count of CRC computation, values of REG\_lost and REG\_duplicated are sent to network management entity.

#### 5 11.4.1 TCE processing mode

##### 11.4.1.1 Processing mode of G.702 PDH

For this sub-section, it is necessary to identify TCE data structure and the clock operation mode at the DL service boundary, i.e. framing or non-framing, types of clock (synchronous or asynchronous) where needed to make comparison to a network clock. Asynchronous and synchronous TCE transport provides transport of signals from TCE sources whose clocks are non-frequency-locked and frequency-locked to a network clock respectively. The judgement of synchronous or asynchronous will depend on the service provided by the specific network, i.e. PDH, SDH, or ISDN. Care should be taken to select the shortest transport path, control priority of delivery and transient, and reduce transport latency and latency variation along MSR during the project installation phase.

#### 15 1) Asynchronous G.702 circuit

- Circuit rate at DL service boundary: 1.544, 2.048, 6.312, 8.448, 44.736 and 34.368 Mbit/s as described in Recommendation G.702.
- Payload size to be encapsulated: see Table 22
- Source clock frequency recovery: Asynchronous frequency
- 20 • Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

## 2) Synchronous G.702 circuit

- Circuit rate at DL service boundary: 1.544, 2.048, 6.312, 8.448, 44.736 and 34.368 Mbit/s as described in Recommendation G.702.

- Payload size to be encapsulated: see Table 22
- Source clock frequency recovery: Synchronous timing
- Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

## 11.4.1.2 Processing mode of Video signal transport

- 10 This sub-section presents the processing mode of Video signal transport. Care should be taken to select the shortest transport path, control priority of delivery and transient, and reduce transport latency and latency variation along MSR during the project installation phase.

1) Mode of Conversational services of  $p \times 64$  kbit/s signals

This sub-section gives the processing mode of interactive video signals of the  $p \times 64$

- 15 videotelephony and videoconference applications as described in Recommendation H.320.

- a) Circuit rate at DL service boundary: 384, 1536 or 1920 kbit/s in the 64 kbit/s-based ISDN by using H0, H11, H12, respectively.

- b) Payload size to be encapsulated: see Table 22

- c) Source clock frequency recovery: Synchronous timing

- d) Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

## 2) Mode of Distributive television services

This sub-section illustrates transport of distributive television signals encoded by using MPEG2 with a constant bit rate described in Recommendation J.82.

- a) Circuit rate at DL service boundary: Depending on MPEG2 parameters
- b) Payload size to be encapsulated: see Table 22
- c) Source clock frequency recovery: Asynchronous frequency

- d) Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

3) Mode of Conversational services of bit rates higher than primary rates

This sub-section illustrates transport of interactive video signals for, i.e. video-telephony and conference application described in Recommendation H.310.

- a) Circuit rate at DL service boundary: Depending on H.310 parameters  
 b) Payload size to be encapsulated: see Table 22  
 c) Source clock frequency recovery: Synchronous/Asynchronous per Recommendation H.310

- 10 d) Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive. Recommendation H.310 should be taken into account.

11.4.1.3 Processing mode of digital channel supported by 64 kbit/s-based ISDN

This sub-section presents the processing mode of digital channel supported by 64 kbit/s-based ISDN. Care should be taken to select the shortest transport path, control priority of delivery and transient, and reduce transport latency and latency variation along MSR during the project installation phase.

1) Mode of 64 kbit/s channel

- 20 a) Circuit rate at DL service boundary: 64 kbit/s  
 b) Payload size to be encapsulated: see Table 22  
 c) Source clock frequency recovery: Synchronous timing  
 d) Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

2) Mode of 384, 1536 or 1920 kbit/s channel

- 25 a) Circuit rate at DL service boundary: 384, 1536 or 1920 kbit/s  
 b) Payload size to be encapsulated: see Table 22  
 c) Source clock frequency recovery: Synchronous timing



- d) Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

#### 11.4.1.4 Processing mode of Voice-band signal

This sub-section presents the processing mode of 64 kbit/s A-law or  $\mu$ -law coded Recommendation G.711 signals. Care should be taken to select the shortest transport path, control priority of delivery and transient, and reduce transport latency and latency variation along MSR during the project installation phase.

- a) Circuit rate at DL service boundary: 64 kbit/s  
b) Payload size to be encapsulated: see Table 22  
c) Source clock frequency recovery: Synchronous timing  
d) Error status indication at the receiver: count report of lost or duplicated frames by MDL-ERROR Indication primitive.

#### 11.4.2 TCE Function of MSR Data Link

##### 11.4.2.1 TCE Functions for circuit

The following sections provide both asynchronous and synchronous TCE transport function along MSR or other topologies. Asynchronous and synchronous TCE supports transport of signals from constant bit rate sources whose clocks are non-frequency-locked and frequency-locked respectively to a network clock. Asynchronous examples are Recommendation G.702 signals at 1.544, 2.048, 6.312, 8.448, 32.064, 44.736 and 34.368 Mbit/s, Synchronous examples are at 64, 384, 1536 and 1920 kbit/s as described in Recommendation I.231.

##### 1) Consideration of DL user information

The length of the DL-SDU is 64 octets. A DL-SDU constitutes one DL PDU payload.

For those DL users that require a peer-to-peer presetting of structured data, i.e. 8 kHz structured data for circuit mode bearer services of the 64 kbit/s-based ISDN.

##### 2) Processing strategy of frame delay variation

A buffer mechanism is used to support this function. In the event of buffer underflow, it can be necessary for the DL to maintain bit count integrity by inserting the appropriate number of dummy bits. In the event of buffer overflow, it may be necessary for the DL to maintain bit count integrity by dropping the appropriate number of bits.

5 When Recommendation G.702 1.544-Mbit/s and 2.048-Mbit/s signals are being transported, the inserted dummy bits shall be all "1"s.

3) Processing strategy of lost and duplicated frames

A destination DL can determine whether the frames have been lost by tracking the Frame Sequence Number (FSN) or sequence count values of the received DL PDUs. Detected  
10 duplicated frames are discarded. The DL procedure to be used for sequence count processing is described in 11.5.2.

In order to maintain the bit count integrity of the DL user information, it may be necessary to compensate for lost frames detected by buffer underflow and sequence count processing by inserting the appropriate number of dummy payloads. The content of this dummy  
15 payload depends on the DL service being provided. For example, this dummy payload is all "1"s for Recommendation G.702 1.544 Mbit/s and 2.048-Mbit/s signals.

4) Guaranty of jitter and wander

This function is required for delivery of DL-SDUs to a DL user at a constant bit rate. Recovered source clock should meet the requirement of jitter and wander performance of  
20 the related Recommendation defined. For example, the jitter and wander performance for Recommendation G.702 signals is described in Recommendations G.823 and G.824, for which the DL procedure to be used.

#### 11.4.2.2 TCE Functions of video signal

The following sections present processing of video signals for interactive and distributive services:

25 1) Consideration of DL user information

The length of the DL-SDU is 188 octets. A DL-SDU constitutes one DL PDU payload.

For those DL users that require a peer-to-peer presetting of structured data. Depending on the type of DL service provided (i.e. the interface to the DL user), the ERROR parameter will be passed to the DL user to facilitate further picture processing.

2) Processing strategy of frame delay variation

A buffer mechanism is used to support this function. The size of this buffer is dependent upon descriptions video signal. In the event of buffer underflow, it may be necessary for the DL to maintain bit count integrity by inserting the appropriate number of dummy bits. In the event of buffer overflow, it may be necessary for the DL to maintain bit count integrity by dropping the appropriate number of bits.

3) Processing of lost and duplicated frames

A destination DL can determine whether the frame has been lost by tracking the Frame Sequence Number (FSN) or sequence count values of the received DL PDUs. Detected duplicated frames are discarded. The DL procedure to be used for sequence count processing is described in 11.5.2.

In order to maintain the bit count integrity of the DL user information, it may be necessary to compensate for lost frames detected by buffer underflow and sequence count processing by inserting the appropriate number of dummy payloads. The content of this dummy payload depends on the DL service being provided.

Information in lost frames may be recovered by the mechanism described in e).

4) Guaranty of jitter and wander

This function is required for delivery of DL-SDUs to a DL user at a constant bit rate.

Some DL users may require source clock frequency recovery, i.e. recovery in the receive side of camera clock frequency that is not locked to the network clock. The DL procedures available for that purpose are given in 11.5.2.

#### 11.4.2.3 TCE Functions of voice-band signal

The following sections support processing of a single voice-band signal, i.e. one 64 kbit/s A-law or -law coded Recommendation G.711 signal.

1) Consideration of DL user information

The length of the DL-SDU is 64 octets. A DL-SDU constitutes one DL PDU payload.

2) Processing of frame delay variation

A buffer mechanism is used to support this function. The size of this buffer depends on descriptions provided in voice-band signal.

## 3) Processing strategy of lost and duplicated frames

For voice-band signals, there is a need still to detect duplicated and lost frames.

The receiving DL entity must detect/compensate for lost frame events to maintain bit count integrity and must also minimize the delay, i.e. to alleviate echo performance problems, in conveying the individual voice-band signal octets from the DL-PDU payload to the DL user. The receiving DL entity may take actions based on the received Sequence Number values, but such actions must not increase the conveyance delay across the DL receiving entity to alleviate echo performance problems.

The DL receiving entity must accommodate a sudden increase or decrease in the nominal frame transfer delay. (A protection switching event in the MSR may result in a change of transfer delay.)

## 4) Guaranty of jitter and wander

The DL provides synchronous circuit transport for the voice-band signal.

NOTE 1 – Example receiver techniques using a timing-based mechanism or a buffer-fill-based mechanism, possibly supplemented by a Sequence Number processing algorithm that does not introduce additional delay.

NOTE 2 – For transporting signals of speech and 3.1 kHz audio bearer services as described in 64 kbit/s ISDN, the need for A-law conversion is identified. The conversion between A-law and  $\mu$ -law coded PCM octets are as described in Recommendation G.711.

This conversion function is outside the scope of this Patent.

## 11.4.2.4 TCE Functions of high quality audio signal

The case is the same as the above. The TCE functions of high quality audio signals in DL include the following capabilities in principle.

- a) Consideration of DL user information;
- b) Processing strategy of frame delay variation;
- c) Processing of lost and duplicated frames;
- d) Guaranty of jitter and wander;

### 11.5 DL protocol involved to support TCE

The following sub-sections describe DL procedures to be provided for implementing DL functions involved to support TCE.

#### 11.5.1 Processing strategy of Frame Sequence Number (FSN)

##### 5 11.5.1.1 Processing in the transmit side

The DL provides a sequence count value and a DL indication associated with each DL-PDU payload in the transmit side. The count value applied to FSN field starts with 0, is incremented sequentially to 63 and is numbered modulo 64 when TT field is set to support TCE function. When the data link frames carrying TCE payloads traverse a MSR or other topologies, then may arrive  
10 destination station disorderly. Due to this reason, it is required that frames must be delivered in order. Ensuring in-order delivery is also effective approach to out-of-order detection.

##### 11.5.1.2 Processing in the receive side

The DL receives and derives the following information associated with each DL-PDU payload in receive side:

- 15 • sequence number;
- count;
- check error of the frame sequence number and count.

The implementation of sequence count values and number will be described on a service specific basis (e.g. REG\_lost and REG\_duplicated). The DL entity in the receive side identifies lost or  
20 duplicated DL-PDU payloads.

DL entity tracks the following status of dynamic data stream:

- DL-PDU payload sequence number and count;
  - DL-PDU payload loss (if occur);
  - DL-PDU payload duplication (if occur).
- 25 There are two ways to solve the real-time processing problem, (1) try to reorder and sort into the correct order or (2) drop those disordering frames, when disordering case occurred. In implementation, These two methods should be all supported. If method (1) does not meet reliability

transport and performance requirement still, the method (2) will be applied. Due to the limitation of native speed and acceptable delay of data link payloads listed in Table 22, this Patent does not provide correction method for bit errors and frame losses.

#### 11.5.2 Recovery method of timing and structured information

- 5 To support TCE services available in Table 22, the requirements of timing and structured information should be based on the native characteristics of the these services, and it is necessary for these TCEs to recover these signal characteristics as closely described in the related standard as possible in the receive side, including the signal jitter, bit-rate, timing characteristics and structured information transfer (if it has) as it was sent. In most application, STRUCTURE information could
- 10 be provided by the transform and adaptation function of Tributary at the Tributary interface within a node since MSR-LEP uses pre-plan and connection oriented policy, and TCCR is made (e.g. ISDN 64 k/bits Tributary source in a node to ISDN 64 k/bits Tributary sink, E1 Tributary source in a node to E1 Tributary sink) by network management entity or control signalling before Tributary service is operated on-line.
- 15 For the timing characteristics, there are two methods involved: timing (synchronous) signalling broadcasted periodically from that designated station with an external synchronous source along the MSR ring or other topologies, or timing (synchronous) information received from an external facility for referencing to all stations.

#### 20 SYNCHRONIZATION Request (Local NA, T\_sync )

The signalling frame of broadcast SYNCHRONIZATION Request primitive has been assigned to have the highest priority among all other signalling frame defined in this Patent. The broadcasted period is Timer T\_sync. Its default value is 8000 frames per second. This value is programmable and can be changed by network management entity.

25

#### SYNCHRONIZATION Confirm(Non parameter)

After getting the signalling frame of SYNCHRONIZATION Request, said each station will align the phase relations of its oscillator facility (including frequency-locked) and send SYNCHRONIZATION Confirm signalling frame with lower priority to that source station initiated

the signalling frame of SYNCHRONIZATION Request. The codes of these two signalling are listed in the Table 5.

Since the service types and connection relations of TCEs from source to destination, including Node address, TT and TN, are pre-plan before service Tributary is operated, said initial timing (except for phase relations and actual bit-stream) and structured information should be pre-set by configuration function of network management entity before operation of those TCE services. The phase relations and actual bit-stream of TCE signals are designed to perform the extraction of output transmission bit timing information from the delivered frame stream, and requires a phase-locking mechanism.

#### 10 11.6 Management function involved to support TCE

The following functions is required to be provided to the network management entity:

##### 11.6.1 TCE property (including structured information of data stream) mismatch between the source and destination

The related operation is described detailed and refer to section 5.8.

#### 15 12 Tributary Based Protection (TBP)

The said Tributary of this section is a logical service channel defined in 3.41, such as TCEs with a fixed value of Tributary Type (TT) and Tributary Number (TN) in the frame format. The application scope of Tributary based protection involved in this section is located at full-duplex point-to-point application only. The tributary protection operation of half-duplex point-to-point, multicast and broadcast will not be the scope of this section. A Node of MSR can provide support of multiple ETBP and Multiple TTBP at the same time.

## 12.1 TCE Tributary Based Protection (TTBP)

When needed to support the TTBP function, TTBP Function Unit embedded in the corresponding Tributary in DL entity will be activated by the configuration of network management (this configuration is performed either in the projection installation phase or MSR on-line operation phase) and the corresponding Tributary is set to a Working Tributary.

For Operation of 1+1 TTBP, it is needed to designate a mate Standby Tributary with the same service property, source and sink. The payloads of the mate Working Tributary and Standby Tributary carrying the same traffic are required.

For 1:1 TTBP, it is also needed to designate a mate Standby Tributary with the same service property, source and sink. The payloads of the Standby Tributary can run the other additional traffic (Once TTBP occurred for this Working Tributary, the additional traffic will be dropped out).

For 1:N TTBP, there are N Working Tributaries; it is also needed to designate a mate Standby Tributary with the same service property, source and sink. The payloads of the Standby Tributary can run the other additional traffic (Once TTBP in one of N Working Tributary occurred, this additional traffic will be dropped out).

The CS&NM operational codes of TTBP are listed in the Table 23.

TABLE 23 – Codes of TTBP frame

CS&NM Frame Types	Code
1+1 TTBP_Request Frame	00100111
1+1_TTBP_Response Frame	00101000
1:1 TTBP_Request Frame	00101001
1:1_TTBP_Response Frame	00101010
1:N TTBP_Request Frame	00101011
1:N_TTBP_Response Frame	00101100
TTBP_RECOVERY_EVENT_Report	00101101



Note: 1+1 and 1:1 TTBP\_Request Frame is a multicast frame and should be issued to four ends of two targeted Tributaries (including the working and standby tributaries) at the same time.

1:N TTBP\_Request Frame is a multicast frame and should be issued to multiple ends of targeted Tributaries (including the N working tributaries and a standby tributary) at the same time.

The parameters of the 1+1, 1:1 and 1:N TTBP Response frame in this sub-section are described in Table 24.

5

TABLE 24 – Parameters of Bandwidth Limitation\_Response Frame

CS&NM Frame Types	Code
TTBP successful	Binary "00000001 00010011 00000001 00000000"
TTBP unsuccessful	Binary "00000001 00010100 00000001 00000000"

The parameters of 1+1 TTBP\_Request Frame and 1:1 TTBP\_Request Frame have the same format as that of the unicast mode of TCCR ID. This parameter consists of TNi ID (This is an identifier of Tributary p within node x), 2-bit U/M/B field, 14-bit length field (This field is used to reflect the total number of Tributary TNj ID following length field, its value should be binary 0000000000000001) and a TNj ID (This is an identifier of Tributary q within node y).

Fig. 10 shows expressions of 1+1 and 1:1 tributary protection parameters according to the invention. In Fig. 10,  $TN_i ID = N \times (x=1,2,3 \dots 32) + TT + TN_p$  ( $p=0,1,2,3, \dots 2^{16}-1$ ), to identify the pth Tributary with the fixed TT and TN value within xth node. TNi ID and TNj ID stand for standby and working tributary respectively.

The parameters of 1+1 TTBP\_Response Frame and 1:1 TTBP\_Response Frame are the same as that of Request primitives above.

The parameters of 1:N TTBP\_Request Frame have the same format as that of the multicast/broadcast mode of TCCR ID. This parameter also consists of TNi ID (This is an identifier of Tributary p within node x), 2-bit U/M/B field, 14-bit length field (This field is used to reflect the total number of Tributary TNj ID following length field, its value should be binary 000000

5 00000001) and a TNj ID (This is an identifier of Tributary q within node y). Please refer to as Figure 11.

Fig. 11 shows EXPRESSIONS OF 1:N TRIBUTARY PROTECTION PARAMETER ACCORDING TO THE INVENTION. In Fig. 11,  $TN_i ID = N \times x (x=1,2,3 \dots 32) + TT + TN_p$  ( $p=0,1,2,3, \dots 2^{16}-1$ ), to identify the pth Tributary with the fixed TT and TN value within xth node.

10  $TN_i ID$  is used to present standby tributary, and  $TN_i ID$ ,  $TN_k ID$  and  $TN_m ID$  etc represent working tributary, the total number is N.

The TTBP Function Unit is used to monitor the link status of Tributary by monitoring the peer link frames of an aggregate. Normally, the entity in the receive side of aggregate does always receive the MAC frame or Inter-frame Gap from the peer. No link-error occurs and no Error-Hello is also sent to the local Tributary entity within a node. It is local matter only and has not any associated frame to be used between the two sides.

--After initialization (the defaults of  $T\_ttbp$  and  $N\_ttbp$  are set to 10 mill-seconds and 3 respectively), the link entity enters the normal way of transmitter and receiver.

20 --If the timer  $T\_ttbp$  expires before any MAC frame or Inter-frame Gap from the aggregate is received, the link entity of aggregate shall restart timer  $T\_ttbp$  and decrement the retransmission counter  $N\_ttbp$ .

--If the timer  $T\_ttbp$  expires and retransmission counter  $N\_ttbp$  has been decremented to zero before any MAC frame or Inter-frame Gap from the aggregate is received, the link entity of the aggregate shall inform the all local Tributary entities (within a node), which are set to have the other protection Tributary, of error report by sending a Error-Hello message from entity of the aggregate to those entities of Tributary within that node. After getting Error-Hello, the local Tributary entity will perform an action of TTBP (1+1, 1:1 or 1:N) to the corresponding Standby Tributary within the same node, change previous transmission channel of aggregate to the counter-rotating ringlet of pre-setting. After the entity of Tributary enters into the normal transmission

30

operation, the local aggregate entity will restart timer T\_ttbp and recover the value of N\_ttbp. Every Standby Tributary has its T\_ttbp and N\_ttbp of itself.

--The value of T\_ttbp and N\_ttbp shall be configurable. The minimum unit configured of T\_ttbp and N\_ttbp is 1 milliseconds and 1 respectively.

- 5 Once TTBP Function Unit detects that the failure span is recovered and enters normal status from the TTBP, TTBP Function Unit will wait T\_ttbp\_wtr (The default to 10 minutes, its value is also programmable and should be much greater than T\_ttbp), and then switch to the Working Tributary. After switching to the Working Tributary, TTBP Function Unit issues a
- TTBP\_RECOVERY\_EVENT\_Report with parameters of TT and TN to network management
- 10 entity.

### 13 Tributary Based Multicast (TBM)

- The Tributary of this section is a logical service channel defined in 3.42, such as TCE with a fixed value of Tributary Type (TT) and Tributary Number (TN) in the MSR frame. The application scope
- 15 of Tributary Based Multicast (TBM) is located at the operation of half-duplex point-to-multi-point only. The full-duplex point-to-point will not be recommended to the scope of this section.

- The TBM Function Unit built in a MSR Node is defined to support one or more independent hierarch of multicast possibly involved the same or different TT at the same time. TBM Function Unit implements a duplication function within a node (station) from a Tributary getting a payload of
- 20 DL frame from the related topologies (e.g. a N-ring structure) to other multiple Tributary with the same TT value and with being set to have a relation of membership group. A group of TN with the same TT value within a Node can be set to become a membership group. It is required that a designated Tributary in the membership group should receive data frames at the reference point T1 from the related topologies (e.g. a N-ring structure). This Patent presents this designated Tributary
- 25 as a Source Tributary (ST). Once getting data frames, the ST duplicates those frames to every Tributary in the corresponding membership group within a node. The ST should be set and designated to a given value of TT and TN by network management entity during the project installation phase or on-line operation phase. The one or more STs can be designated or changed dynamically within a node according to the customer requirements.

The CS&NM operational codes of TBM are listed in the Table 25.

TABLE 25 – Codes of TBM frame

CS&NM Frame Types	Code
TBM_Request Frame	00101101
TBM_Response Frame	00101110

- 5 If a TBP is applied to operation of TBM, it is recommended that a ST be designated to a Working Tributary, and the ST can also be operated to become the working Tributary of 1+1 and 1:1 application described in 12.1.

The parameters of TBM\_Request and TBM\_Response frame in this sub-section are described in

- 10 Table 26 if the multicast/broadcast field is changed from “01” to “10” or “11”.

TABLE 26 – Parameters of TBM\_Response Frame

CS&NM Frame Types	Code
TBM successful	Binary “00000001 00010101 00000001 00000000”
TBM unsuccessful	Binary “00000001 00010110 00000001 00000000”

- 14 Bandwidth Policing, Merging, Line-Speed Filtering, Stacking and Mirroring of Tributary

15

- 14.1 Tributary Based policing -- Bandwidth Limitation with symmetry and asymmetry

TCE rate at DL service boundary should be operated and be fully compliant with the IEEE 802.3, G.702, ISDN and other related standards in the normal case. But in some application of service level agreement, the policy of operation and maintenance needs a limitation for rate to perform the bandwidth-based accounting. The MSR entity provides a Bandwidth Limitation Function Unit. When this Function Unit is activated to a Tributary, this Tributary provides configuration incremental level with minimum unit granularity (64 k/bits for TCE) from 0 to the standard value.

20

The corresponding standard values of bandwidth are described in the related standard and must not be passed over. Once bandwidth is set up for a Tributary during project installation or on-line operation phase, this programmable threshold limit applies to this Tributary and its corresponding port. The setting of bandwidth threshold and monitoring of actual traffic flow are performed by configuration function and management entity.

The CS&NM operational codes of Bandwidth Limitation are listed in the Table 27.

TABLE 27 – Codes of Bandwidth Limitation frame

CS&NM Frame Types	Code
Bandwidth Limitation _Request Frame	00101111
Bandwidth Limitation _Response Frame	00110000
Note: Bandwidth Limitation _Request Frame is a multicast frame and should be issued to two ends of targeted Tributary at the same time.	

- 10 The parameter of Bandwidth Limitation \_Request Frame includes the following elements:
- Targeted (Tributary) Port A:  $TN_i = N A_x + T T + T N_p$
  - Targeted (Tributary) Port B:  $TN_j = N A_y + T T + T N_q$
  - Bandwidth required to be provided from Port A to Port B: a designated integer value (an octet) between 0 and Standard Bandwidth, e.g. binary code:01000100 represents 68\*64 k/bits
  - 15 Bandwidth.
  - Bandwidth required to be provided from B to A: a designated integer value (an octet) between 0 and Standard Bandwidth, e.g. binary code:00100000 represents 32\*64 k/bits Bandwidth (This is an example of asymmetrical bandwidth availability), binary code:00000000 represents no Bandwidth available, it is needed that customers use the operation of half duplex point-to-point
  - 20 from port A to port B.
  - Standard Bandwidth: the related standard (binary code of G.702 E1: 00100000) for TCE
  - Minimum Granularity: 64 k/bits (binary code:00000001) for TCE

Bandwidth from port A to port B and from port B to port A is independent each other. The separated bandwidth can be symmetrical or asymmetrical. All of these elements will be mapped to CS&NM control frame in the above order. Bandwidth Limitation \_Response Frame uses two parameters: Bandwidth Limitation successful or Bandwidth Limitation unsuccessful shown in the

5 Table 28.

TABLE 28 – Parameters of Bandwidth Limitation \_Response Frame

CS&NM Frame Types	Code
Bandwidth Limitation successful	Binary "00000001 00010111 00000001 00000000"
Bandwidth Limitation unsuccessful	Binary "00000001 00011000 00000001 00000000"

Bandwidth Limitation of Tributary Based can be used to operations of half duplex point-to-point, full duplex point-to-point, multicast and broadcast.

#### 14.2 Tributary Merging with symmetry and asymmetry

The MSR entity provides a Merging Function Unit by which up to sixteen Tributaries of the same TT can be merged together to form a Tributary Merging Group (TMG). Up to eight TMGs can be established in a MSR or other topology node. The TMG is similar to one logical link and is very useful when the higher bandwidth of application is required. The member Tributary of a TMG must be of the same TT and configured in full-duplex mode. The benefits of forming a TMG are link

redundancy, aggregate throughput, incremental bandwidth and load balancing on the TMGs. Once a TMG is formed, a TMG of TCE must be identified using only a TN value (It is usual the first member Tributary) in the corresponding frames of data, signalling and network management. For the upper layer application over a TMG, a logical channel can only be seen externally.

The CS&NM operational codes of Tributary Merging are listed in the Table 29.

TABLE 29 – Codes of Tributary Merging frame

CS&NM Frame Types	Code
Tributary Merging _Request Frame	00110001
Tributary Merging _Response Frame	00110010

5 The parameter of Tributary Merging \_Request Frame includes the following elements:

- First Targeted Tributary:  $TN_i = N A_x + TT + TN_p$
- Second Targeted Tributary:  $TN_j = N A_y + TT + TN_q$
- Third Targeted Tributary:  $TN_k = N A_z + TT + TN_r$
- Fourth Targeted Tributary: .....

10

Tributary Merging from A to B and from B to A is independent each other. The Tributary Merging of two half-duplex channels can be symmetrical or asymmetrical. All of these elements will be mapped to CS&NM control frame in the above order. Tributary Merging \_Response Frame uses two parameters: Tributary\_Merging\_successful or Tributary\_Merging\_unsuccessful shown in the

15 Table 30.

TABLE 30 – Parameters of Tributary Merging \_Response Frame

CS&NM Frame Types	Code
Tributary_Merging_successful	Binary "00000001 00011001 00000001 00000000"
Tributary_Merging_unsuccessful	Binary "00000001 00011010 00000001 00000000"

20 Tributary Merging can be used to operations of half duplex point-to-point and full duplex point-to-point.

### 14.3 Tributary Based Security -- Line-Speed Filtering

The MSR entity provides a Line-Speed Filtering Function Unit (LSFFU) of Tributary based to Content-Aware frame classification, which enables a node processing application to filter and classify frames based on certain protocol fields of upper layer in the payload of frame. Filters can be set on the defined fields from Layer 2 to Layer 4 within a frame. LSFFU of a node can filter individual ingress or egress ports of Tributary. Filtering algorithm uses two constructs, (a) the filter mask, which defines which fields to filter, and (b) the rules table, which defines the filtering options. Up to 48 filters are available, each containing a 64-byte wide shuttered filter mask value to apply on any protocol field at any offset within the first 96 bytes of the incoming frame. The rule table is up to 256 entries deep for TCE Tributary.

Once the classification results and filter match or partial match have been gotten, the following policies can be taken, or in their combination:

- Modification of the IP Type Of Service (TOS precedence) field
- Delivery of a copy of the related frames to the domain of management
- Discarding the related frames
- Transferring the related frames to other egress port of a Tributary
- Transmission of a copy of the related frames to the "mirrored to" Tributary
- Modification of protocol field

The LSFFU provides the ability to track and profile up to 1024 data flows. The traffic on these data flows can be monitored or regulated via internal meters and has the ability to assign two independent policies to the profile status of a data flow and execute these actions at line rate.

The CS&NM operational codes of Line-Speed Filtering are listed in the Table 31.

TABLE 31 – Codes of Line-Speed Filtering frame

CS&NM Frame Types	Code
Line-Speed Filtering _Request Frame	00110011



Line-Speed Filtering _Response Frame	00110100
--------------------------------------	----------

The parameter of Line-Speed Filtering \_Request Frame includes the following elements:

- Targeted Tributary:  $TN_i = NAX + TT + TN_p$
- Modification of the IP Type Of Service (TOS precedence) field, binary code:10000001 , the  
5 detailed operation is under study. Otherwise, binary code:00000000 will be used.
- Delivery of a copy of the related frames to the domain of management, binary code:10000010  
represents that action of "Delivery of a copy of the related frames to the domain of  
management" will be taken. Otherwise, binary code:00000000 will be used.
- Discarding the related frames, binary code:10000011 represents that action of "Discarding the  
10 related frames" will be taken. Otherwise, binary code:00000000 will be used.
- Transferring the related frames to other egress port of a Tributary, binary code:10000100  
represents that action of "Transferring the related frames to other egress port of a Tributary  
(This Tributary is presented as  $TN_j = NAX + TT + TN_q$ )" will be taken. So the octet  
"10000100" plus "TN<sub>j</sub>" will be used for this function. Otherwise, binary code:00000000 will  
15 be used.
- Modification of protocol field, binary code:10000101 , the detailed operation is under study.  
Otherwise, binary code:00000000 will be used.

Line-Speed Filtering from A to B and from B to A is independent each other. The Line-Speed

20 Filtering of two half-duplex channels can be selected to use or not use. All of these elements will be  
mapped to CS&NM control frame in the above order. Line-Speed Filtering \_Response Frame uses  
two parameters: Line-Speed Filtering successful or Line-Speed Filtering unsuccessful shown in the  
Table 34.

TABLE 34 – Parameters of Line-Speed Filtering \_Response Frame

CS&NM Frame Types	Code
Line-Speed_Filtering_successful	Binary "00000001 00011011 00000001 00000000"
Line-Speed_Filtering_unsuccessful	Binary "00000001 00011100 00000001 00000000"

Tributary Merging can be used to operations of half duplex point-to-point and full duplex point-to-point.

5 15 Topology Application of Single Fibre Ring, Link-type, Broadcast Network and Pseudo-mesh

15.1 Support of a single fibre ring

MSR is defined for a default application on a N-ring structure. In some case of access, due to the limitation of fibre resource in which two fibres are available to a ring, it is recommended that a  
10 single fibre ring shown in the Figure 12 be applied. If the topology is involved in Figure 12, the L2PS of Aggregate Pipe based, data node insertion and deletion should not be used. Instead, these functions will be switched off via configuration function of the network management. The data and control packet will share the same channel and (N-1)WR/NWR field is always set to "0".

15

Fig. 12 is the Single Fibre Ring of MSR according to the ;another embodiment of the invention;

15.2 Support of a Link-type with Adding and Dropping Tributary Services

In some application, it is needed to build a link-type topology shown in the Figure 13 in which the connection between Node 2 and Node 4 (it is suppositional) is one or more Tributaries. This  
20 Tributary may be a Tributary of other MSR. If the topology is involved in Figure 13, the L2PS of Aggregate Pipe based, data node insertion and deletion should not be used. Instead, these functions will be switched off via configuration function of the network management. The data and control packet will share the same channel and (N-1)WR/NWR field is always set to "0".

Fig. 13 shows A MSR Topology, Link-type with Adding and Dropping Tributary Services  
25 according to the invention;

Fig. 14 shows a MSR Topology, Broadcast Connection to DVB Application according to the present invention;

Fig. 15 shows a MSR Topology, Pseudo-mesh Connection according the invention;

### 15.3 Support of a Broadcast Connection to DVB Application

In DVB application for example, it is needed to build a broadcast network topology shown in the Figure 14 in which the connections from Node 1 to Node2/3/4 are aggregate pipes of single direction. If the topology is involved in Figure 14, the L2PS of aggregate pipe based, data node insertion and deletion, Tributary based Protection and in-band network management should not be used. Instead, these functions will be switched off via configuration function of the network management. The data and control packet will share the same channel and (N-1)WR/NWR field is always set to "0".

### 15.4 Support of a Pseudo-mesh Topology

Pseudo-mesh Topology presented in Figure 20 is a particular example of MSR ring. Eight Nodes via aggregate pipe are attached together to form a MSR ring. This Tributary may be an aggregate pipe of other MSR span with a lower rate than that of this aggregate pipe. The Tributaries of Node 2, 4, 6 and 8 are connected to the Node 9 (it is suppositional). In this application, all function and descriptions described in the patent can be used effectively.

### 16 The physical architecture of a MSR node

A physical architecture of a MSR node (out-of-band CS&NM bus) consists of

(1) Aggregate circuit board (for working mode), which is responsible for the Aggregate. Processor, schedule of traffic bus from all tributaries, Routing Engine, L3 packet forwarding for IP packet, Processing unit of control signalling & Network Management within a node;

(2) Aggregate circuit board (for protection mode), which is responsible for the aggregate processor, schedule of traffic bus from all tributaries, routing engine, L3 packet forwarding for IP packet, processing unit of control signalling & network management within a node when aggregate circuit

board (for working mode) is detected to be involved in failure. If the working board is recovered from failure, this board will be go back to protection mode.(3) CWDM/DWDM unit, which is in charge of transmission of multiple aggregates. For the CWDM, the aggregate will be FEs andGEs. For the DWDM, the aggregate is 10GE.

(4) Tributary circuit board, which is in charge of receive and transmission by traffic bus from Aggregate circuit board, the adaptation and processing of various independent adding/dropping tributary channel to/from the MSR data nodes, just like a series "Private Line or Private Circuit for Renting from Carrier". Tributary can be a various G.702 interfaces, ISDN, DVB, audioband, videoband. The different tributary can be assigned to different priority. In the transmission side, all services are sent in packet way after adaptation function of Tributary circuit board is performed. The access of all services is implemented in this board. This board does also receive CS&NM message from CS&NM bus.

(5) Traffic bus, which is responsible for the traffic information exchange between Aggregate circuit board and Tributary circuit board.

(6) CS & NM bus, which is responsible for the information exchange of CS& NM between Aggregate circuit board and Tributary circuit board. The PCI bus or RS-485 is a example of CS&NM bus.

Please refer to as Figure 16. Fig. 16 shows the Physical Architecture of a MSR node (Out-of-band CS&NM Bus) according to one embodiment according to the present invention.

The Figure 17 shows a physical architecture of a MSR node (in-band CS&NM bus) consisting of

(1) Aggregate circuit board (for working mode),

(2) Aggregate circuit board (for protection mode), (3) CWDM/DWDM unit,

(4) Tributary circuit board, this board does also receive CS&NM message from traffic bus.

(5) Traffic bus, which is responsible for the traffic information exchange between Aggregate circuit board and Tributary circuit board.

(6) CS & NM bus shares the physical channel of traffic, which is responsible for the information exchange of CS& NM between Aggregate circuit board and Tributary circuit board.

Fig. 17 is the Physical Architecture of a MSR node (in-band CS&NM Bus) according to one embodiment of the invention;

Fig. 18 is Layout of system equipment of a MSR node according to one embodiment of the invention.

The layout of system equipment of a MSR node is shown in Figure 18, including the shelf, backplane, Aggregate circuit board (for working and protection respectively), fourteen Tributary circuit boards, network management interface etc.

## 5 17. CWDM/DWDM unit

This unit is used to two-fibre and multiple wavelength transmission based on coarse wavelength division multiplex (CWDM) or dense wavelength division multiplex (DWDM). When CWDM is used in N-ringlet architecture, N can be 4, 8, 16 and the aggregate can be FE/GE/10GE. If DWDM is used in N-ringlet architecture, N can be 8, 16, 32, 64, 128, 256, 512 and 1024 and the aggregate must be 10GE with Wide Area Interface – SONET (Synchronous Optical Network ) transmission, or using STM-16/OC-48 channel (into DWDM) in which STM-16/OC-48 carries GEs and FEs.

### Industrial applicability:

The present invention can provide the following capabilities:

- 15 (1) The protocol encapsulation and transport of G.702 PDH circuit -- Synchronous and asynchronous circuit transport, Video signal, Voiceband signal, Digital channel supported by 64 kbit/s-based ISDN etc over a two-fibre ring, a single fibre ring, a link-type and broadcast topology of fibres.
- (2) Service (or tributary) based protection of 1+1, 1:1, and 1:N models within 50 ms.
- 20 (3) Service or tributary based multicast and station-based multicast and broadcast.
- (4) Bandwidth limitation of service (or tributary) based with symmetry and asymmetry.
- (5) Tributary merging with symmetry and asymmetry.
- (6) Line-speed filtering of tributary based.
- (7) Tributary based performance monitoring in 15-minute and 24-hour.
- 25 (8) Mirroring of tributary.
- (9) Frame based transparent PPPoE and PPPoA transport from access to backbone along a MSR ring or other topologies, in order to simplify accounting mechanism (e.g. Radius), reduce maintenance work, and improve latency variation (compared to Layer 2 and Layer 3 switch) in

Access network application.

This application will be used to Metro Area Network, concentrator of telecom and datacom, enterprise and campus network, and other private network. The related network may include interface to coarse wavelength division multiplex (CWDM) or dense wavelength division multiplex (DWDM) equipments.

It is to be understood that the above descriptions should not be construed as limitations on the scope of the invention, but rather as an exemplification of preferred embodiments thereof. Accordingly, the scope of the invention should be determined by the appended claims and their equivalents. Any variations or modifications within the spirit and scope of the invention are covered by the appended claims.

## Claims:

1. A data transmission apparatus used in a multiple service ring including at least two nodes coupled to at least one aggregate pipe and at least one tributary, said apparatus comprising:

5 a tributary RX framer coupled to a tributary for deframing data frames received from said tributary and extracting a destination node address;

a TX framer for encapsulating the destination node address and the data received from the tributary into frames of the multiple service ring and transmitting the same along an aggregate pipe to a downstream neighbor node in the ring;

10 a RX framer for receiving and deframing data frames of the multiple service ring from an upstream neighbor node along an aggregate pipe to obtain at least a destination node address and actual data;

filtering means for determining data frames for local node according to the destination node address, and forwarding the other frames to said TX framer so as to forward the other frames to a next node;

15 a tributary TX framer for encapsulating said data frames for local node into tributary data frames and sending the tributary data frames to a corresponding tributary.

2. The data transmission apparatus according to claim 1, wherein each aggregate pipe comprises a N-ring structure consisting of N-M unidirectional ringlets and M unidirectional counter-rotating ringlets, where N and M are integers and  $1 \leq M < N$ .

20

3. The data transmission apparatus according to claim 2, further comprising a ring management unit for controlling the use of the ringlets in one aggregate pipe, including assigning a specific (n-1)-th ringlet for transporting data packets in said (n-1)-th ringlet in unidirectional direction and a n-th ringlet for transporting control packets in said n-th ringlet in the opposite direction, where  $1 < n \leq N$ .

25

4. The data transmission apparatus according to claim 3, wherein said n-th ringlet as a control channel of (n-1)-ringlet is also set default as a protection channel of (n-1)th ringlet in the case of fibre facility failure or signal degradation of (n-1)th ringlet.

5. The data transmission apparatus according to any one of claims 1-4, further comprising a tributary identifier setting-up means for setting-up an identifier for indicating the originating tributary, and said tributary identifier are encapsulated together with the destination node address and the data received from the tributary into frames of the multiple service ring.

6. The data transmission apparatus according to claim 5, further comprising a tributary determining means for determining the tributary type and tributary No. from the data frames for local node, so as to send said tributary data frames to the corresponding tributary.

7. The data transmission apparatus according to claim 6, wherein said data frames of the MSR are FE/GE/10GE MAC frames.

8. The data transmission apparatus according to claim 7, further comprising a CWDM/DWDM unit for transmission of multiple aggregates, for the CWDM, the aggregate will be Fes, GEs and 10GE, and be operated at  $N=4/8/16$ ; for the DWDM, the aggregate is 10GE with Wide Interface sublayer-SONET (Synchronous Optical Network ) transmission, or using STM-16/OC-48 channel (into DWDM) in which STM-16/OC-48 carries GEs and FEs., and ringlet number,  $N$ , can be up to 1024.

9. The data transmission apparatus according to claim 8, wherein said  $N=1$ , and  $M=0$ , which means the aggregate pipe include a single fibre ring, and all the data frames and control frames are transported in said single fibre ring.

10. The data transmission apparatus according to claim 1, wherein each aggregate pipe includes link and broadcast topologies.

11. A data transmission method used in a multiple service ring including at least two nodes coupled to at least one aggregate pipe and at least one tributary, said method comprising the steps of:



for data frames from a tributary,

receiving and deframing data frames from said tributary and extracting a destination node address; and

5 encapsulating the destination node address and the data received from the tributary into frames of the multiple service ring and transmitting the same along an aggregate pipe to a downstream neighbor node in the ring;

and for data frames from an upstream neighbor node along an aggregate pipe,

receiving and deframing data frames of the multiple service ring from the upstream neighbor node along the aggregate pipe to obtain at least a destination node address and actual data;

10 determining data frames for local node according to the destination node address, and forwarding the other frames to a next node; and

encapsulating said data frames for local node into tributary data frames and sending the tributary data frames to a corresponding tributary.

15 12. The data transmission method according to claim 11, wherein each aggregate pipe comprises a N-ring structure consisting of N-M unidirectional ringlets and M unidirectional counter-rotating ringlets, where N and M are integers and  $1 \leq M < N$ .

20 13. The data transmission method according to claim 12, further comprising the step of controlling the use of the ringlets in one aggregate pipe, including assigning a specific (n-1)-th ringlet for transporting data packets in said (n-1)-th ringlet in unidirectional direction and a n-th ringlet for transporting control packets in said n-th ringlet in the opposite direction. where  $1 < n \leq N$ .

25 14. The data transmission method according to claim 13, wherein said n-th ringlet as a control channel of (n-1)-ringlet is also set default as a protection channel of (n-1)th ringlet in the case of fibre facility failure or signal degradation of (n-1)th ringlet.

15. The data transmission method according to any one of claims 11-14, wherein for data frames from the upstream neighbor node, said method further comprises the step of setting-up an identifier for indicating the originating tributary, and wherein said tributary identifier are encapsulated together with the destination node address and the data received from the tributary into frames of the multiple service ring.

16. The data transmission method according to claim 15, further comprising a step of determining the tributary type and tributary No. from the data frames for local node, so as to send said tributary data frames to the corresponding tributary.

17. The data transmission method according to claim 16, wherein said data frames of the MSR are FE/GE/10GE MAC frames.

18. The data transmission method according to claim 17, wherein multiple aggregates are used for CWDM/DWDM, for the CWDM, the aggregate will be FEs, GEs and 10GE, and be operated at  $N=4/8/16$ ; for the DWDM, the aggregate is 10GE with Wide Interface sublayer- SONET (Synchronous Optical Network ) transmission, or using STM-16/OC-48 channel (into DWDM) in which STM-16/OC-48 carries GEs and FEs., and ringlet number, N, can be up to 1024.

19. The data transmission method according to claim 18, wherein said  $N=1$ , and  $M=0$ , which means the aggregate pipe include a single fibre ring, and all the data frames and control frames are transported in said single fibre ring.

20. The data transmission method according to claim 11, wherein each aggregate pipe includes link and broadcast topologies.

21. The data transmission apparatus according to claim 3, wherein one of the N ringlets is set as a protection channel for the other ringlets.

22. The data transmission method according to claim 13, wherein one of the  $N$  ringlets is set as a protection channel for the other ringlets.

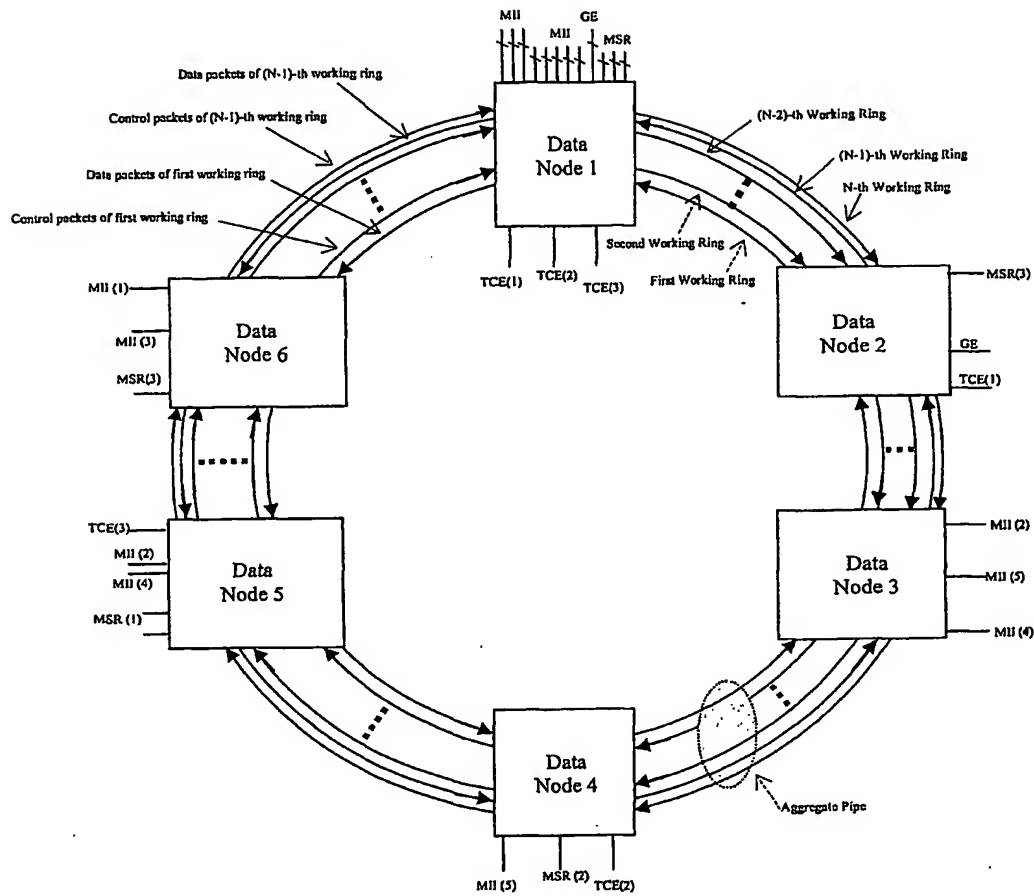


Fig. 1

**The Topology of Multiple Services Ring**

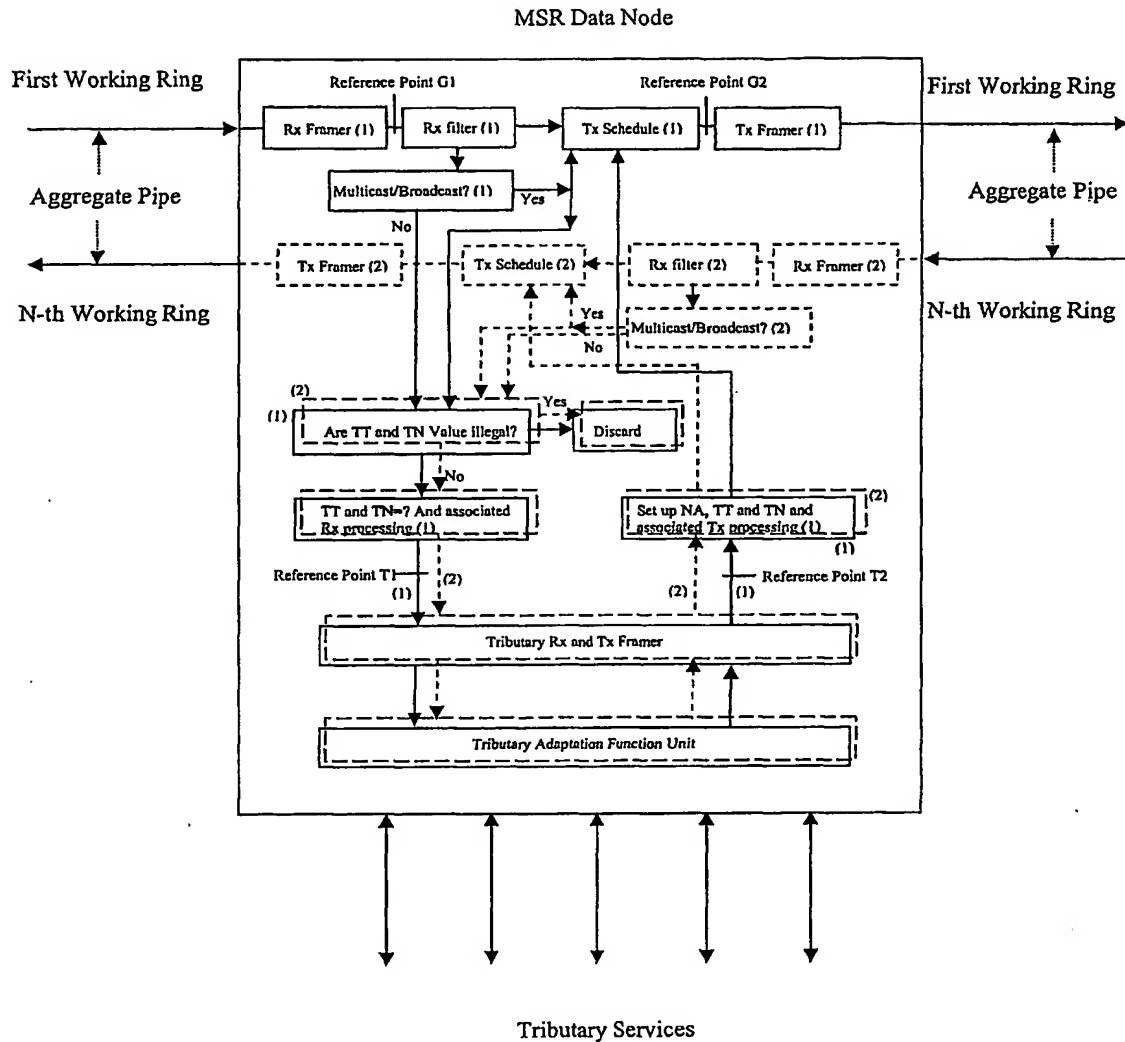


Fig. 2

Tx and Rx Function Diagram of MSR Data Node

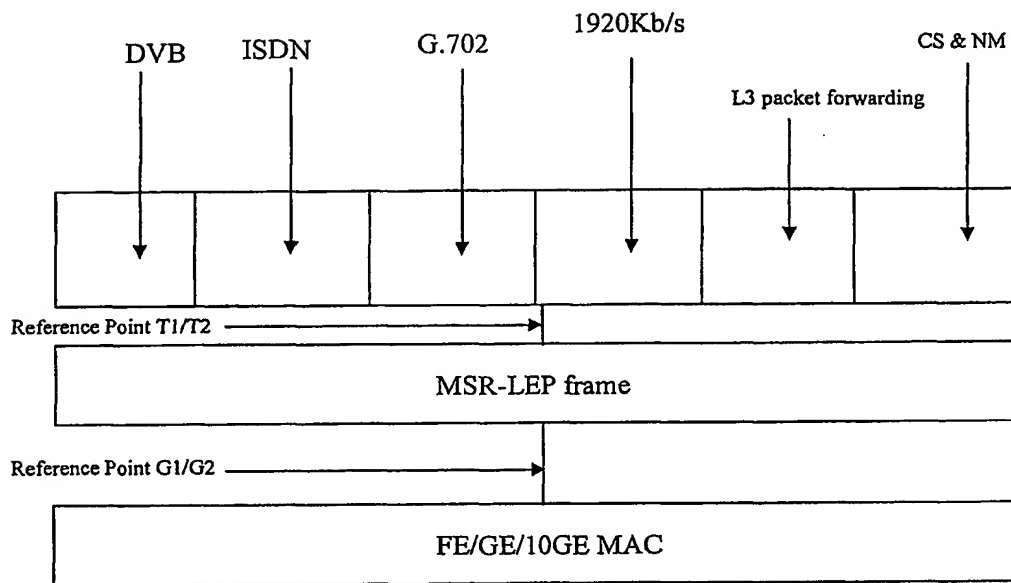


Fig. 3

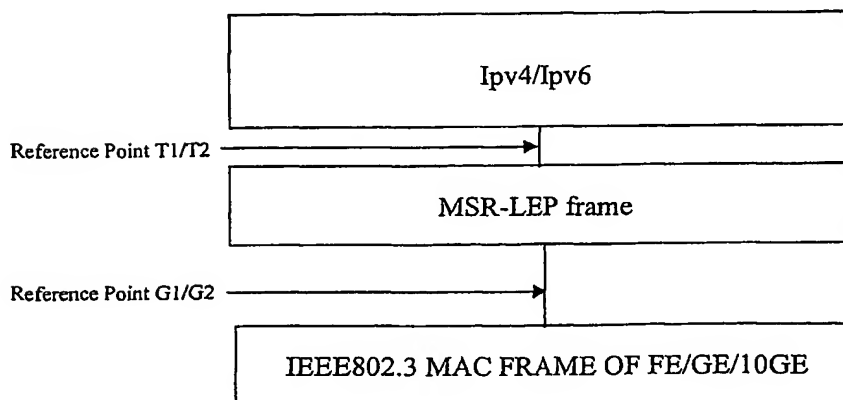
**Generic Protocol Stack of MSR**

Fig. 4

**Protocol Stack of IP over LEP in GE and 10GE based Aggregate Pipe, it will be used to Layer 3 forwarding packet**

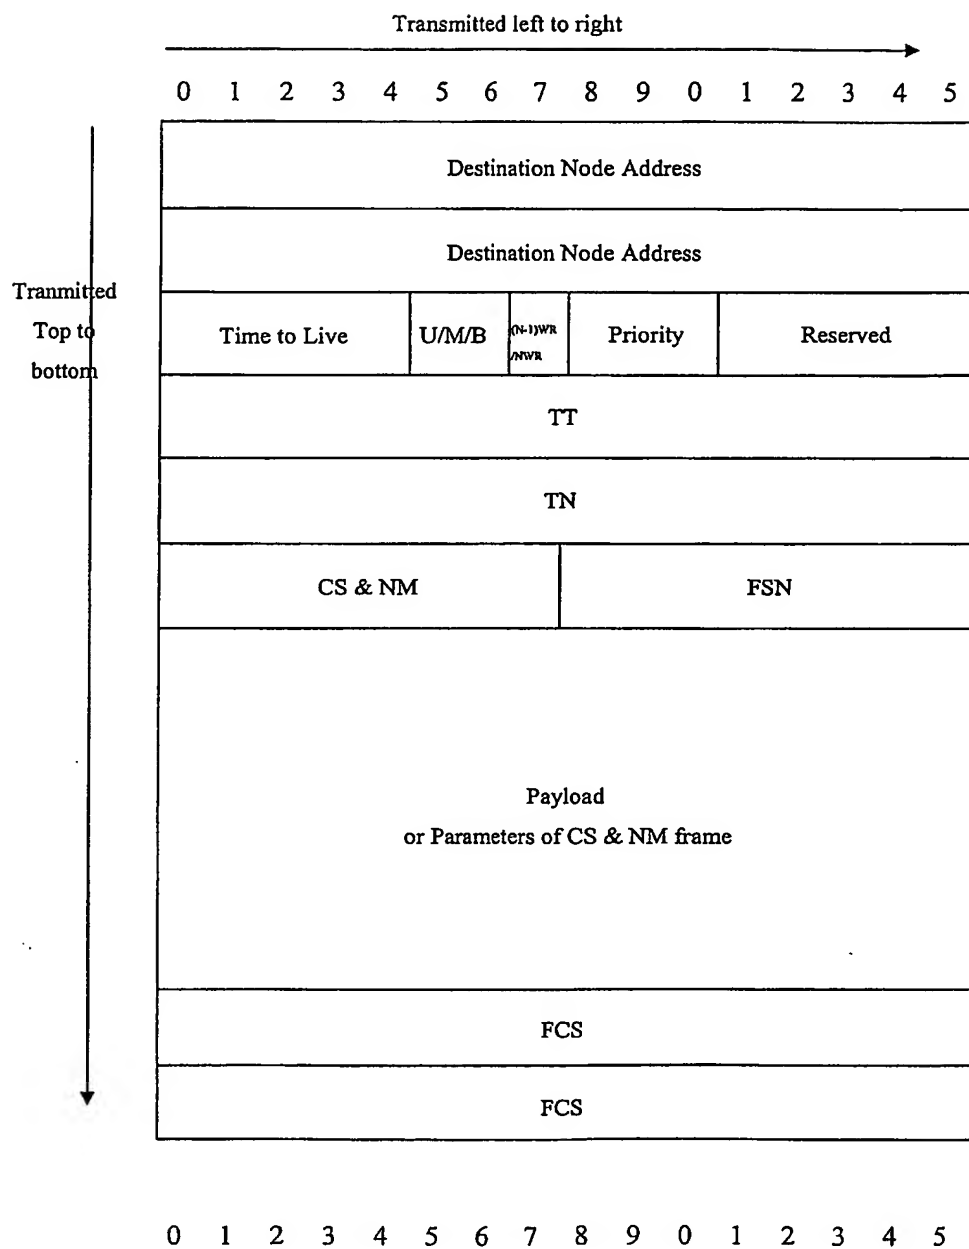
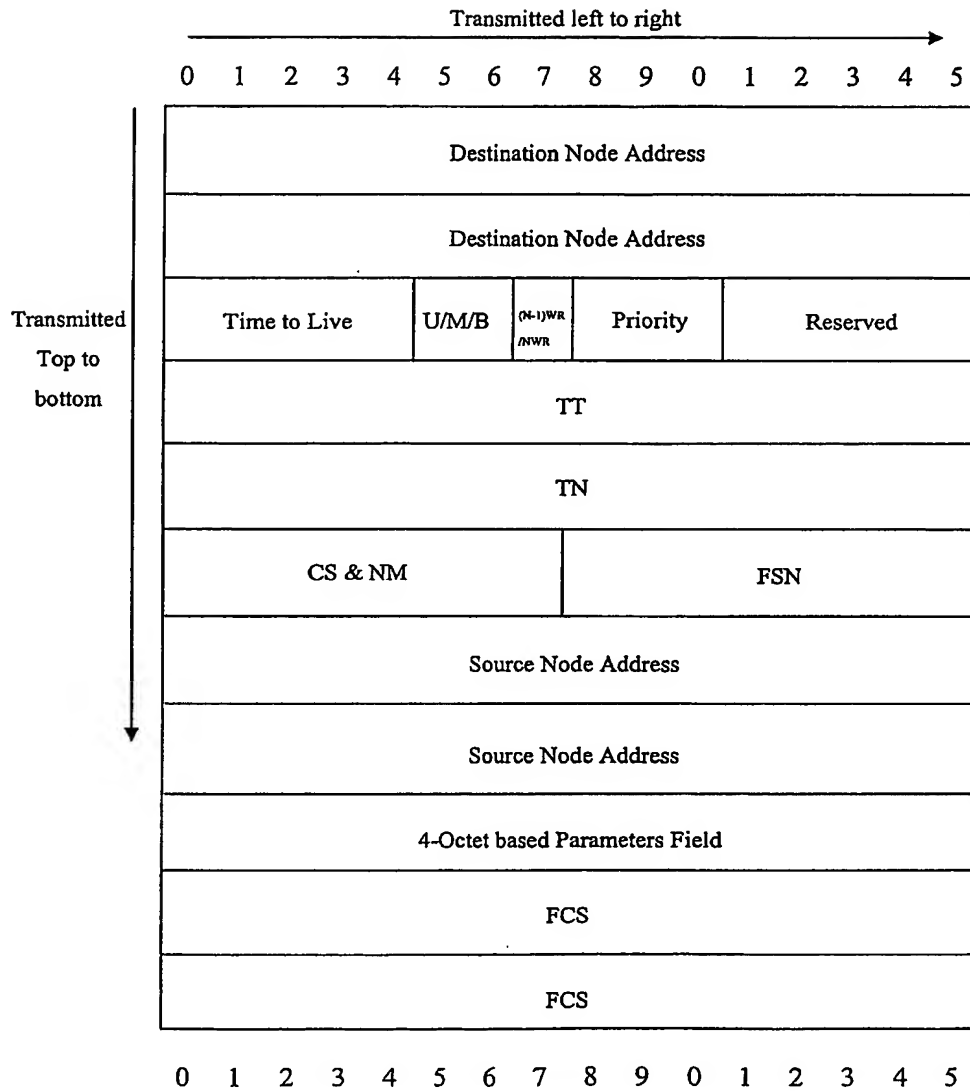


Fig. 5

Generic Frame Format of MSR for the working ring



**Fig. 6**  
**Generic Format of CS & NM Frames**



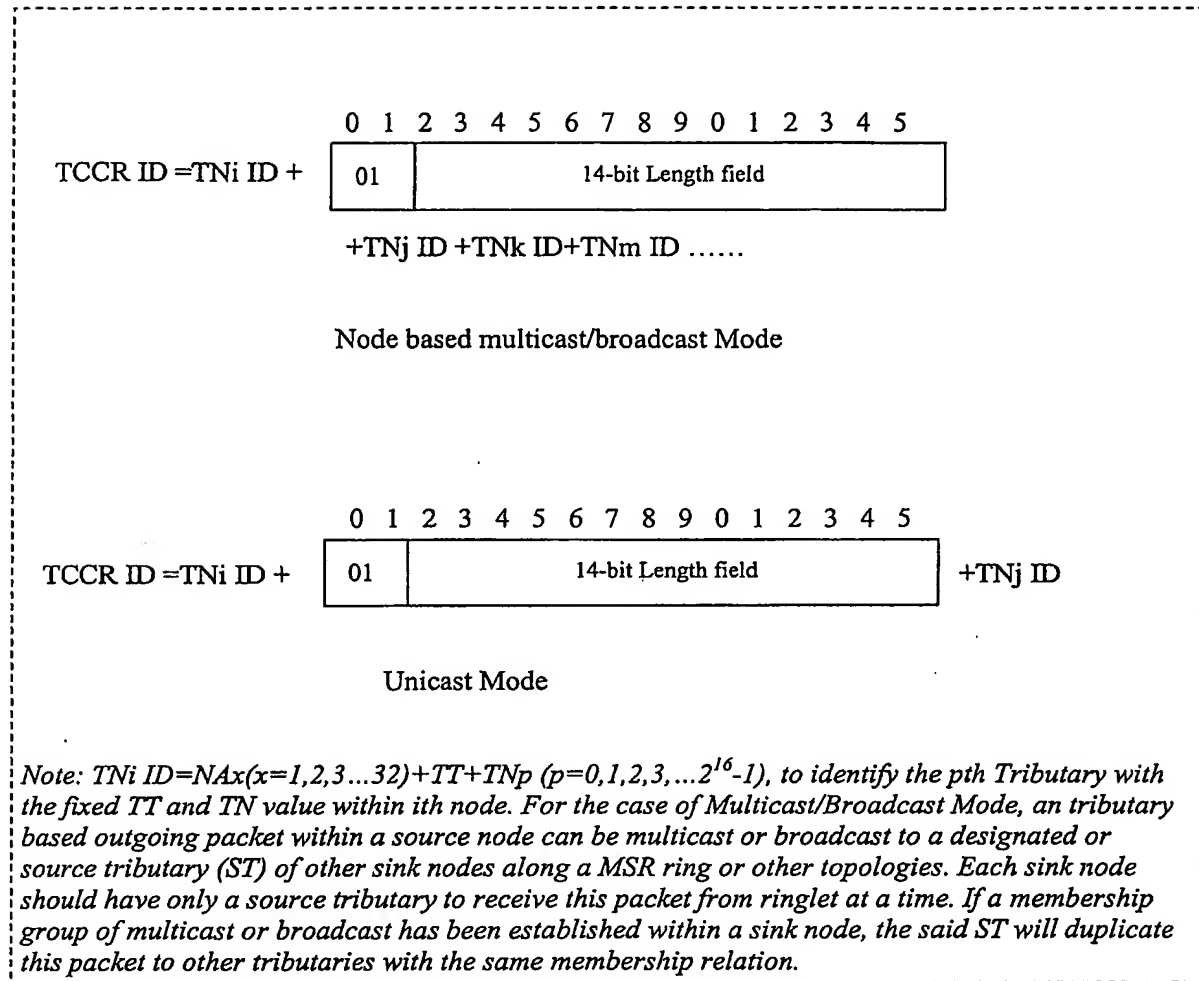


Fig. 7

Expressions of TN ID and TCCR ID

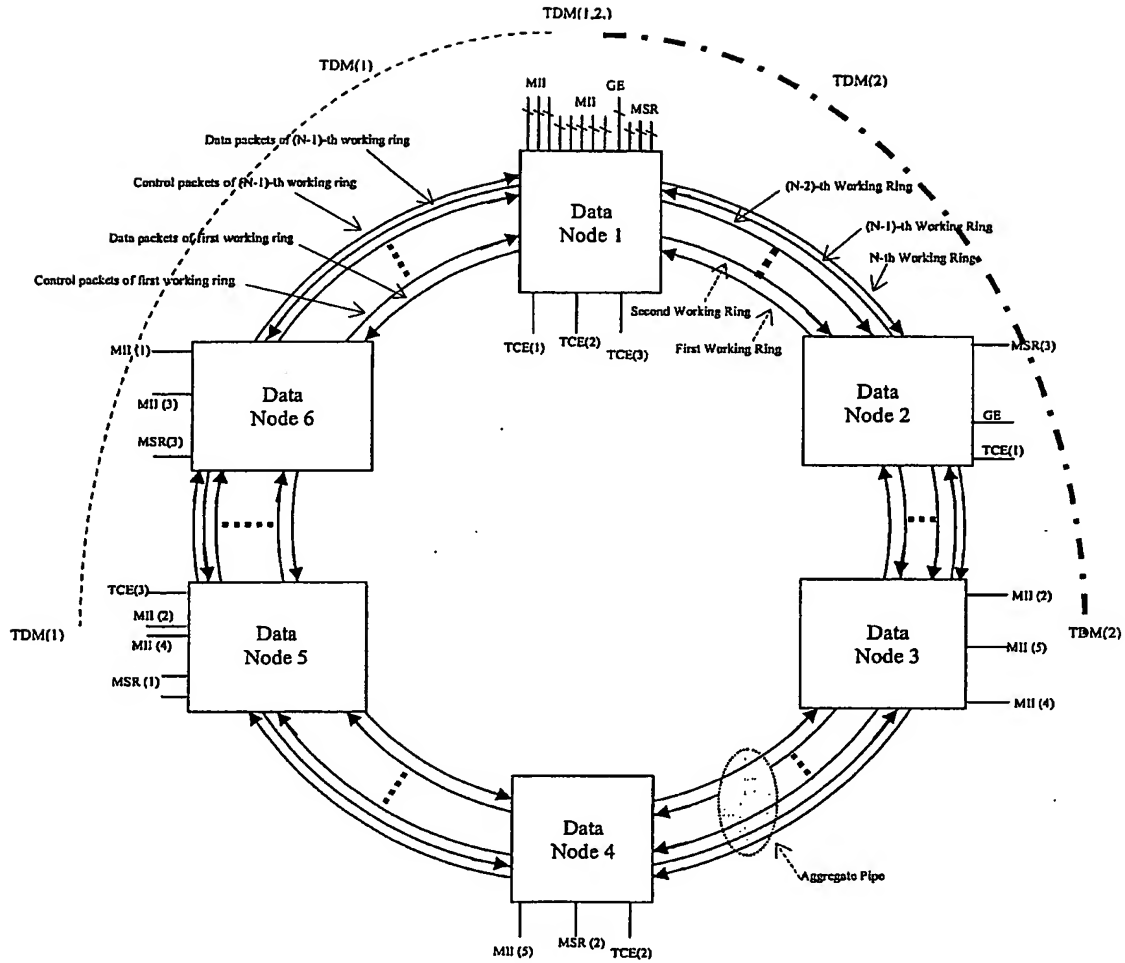


Fig. 8

The TDM Service Channel along MSR

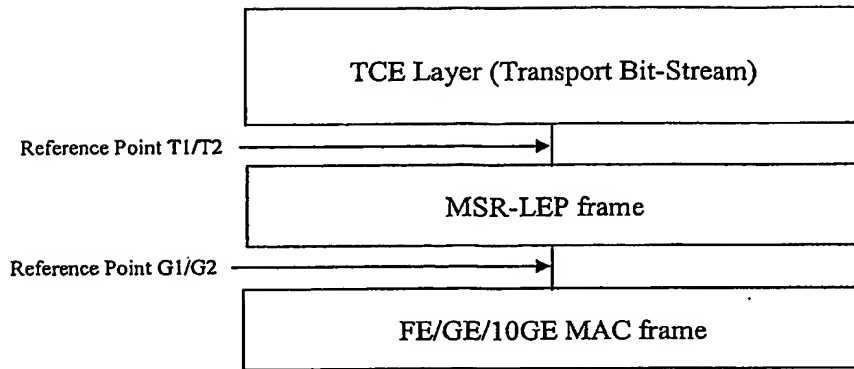


Fig. 9

### THE TDM SERVICE CHANNEL OVER BIT FE/GE/10GE

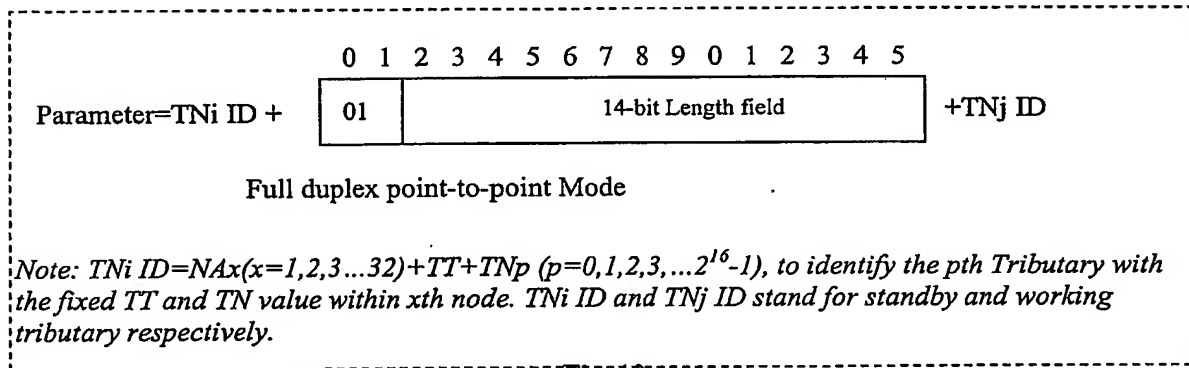


Fig. 10

### Expressions of 1+1 and 1:1 tributary protection parameters

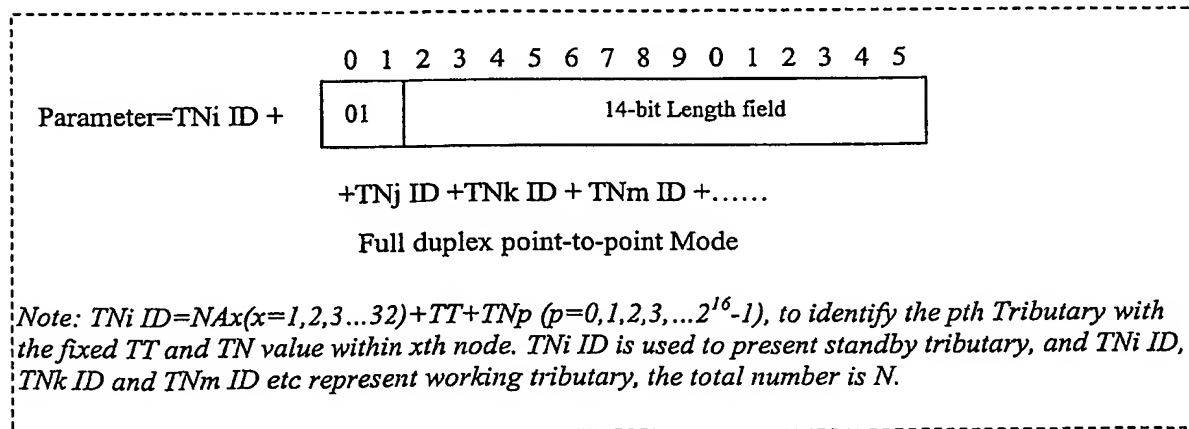


Fig. 11

### Expressions of 1:N tributary protection parameter

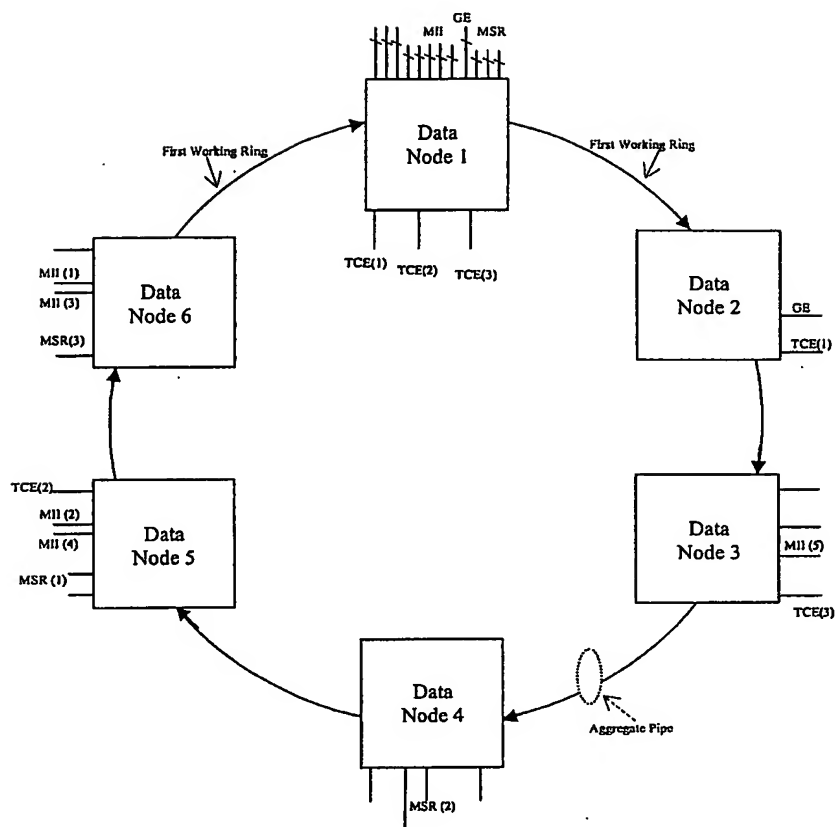


Fig. 12

The Single Fibre Ring of MSR

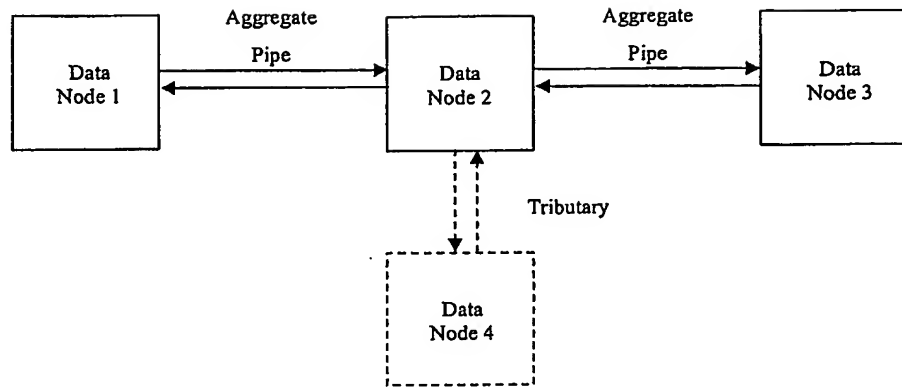


Fig. 13

**A MSR Topology, Link-type with Adding and Dropping Tributary Services**

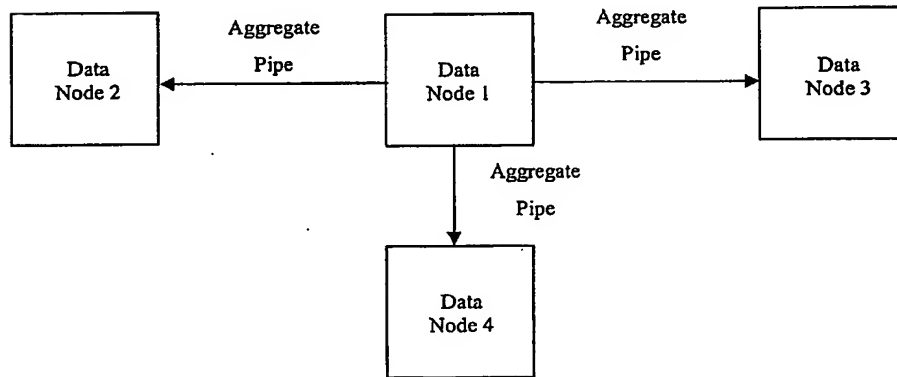


Fig. 14

**A MSR Topology, Broadcast Connection to DVB Application**

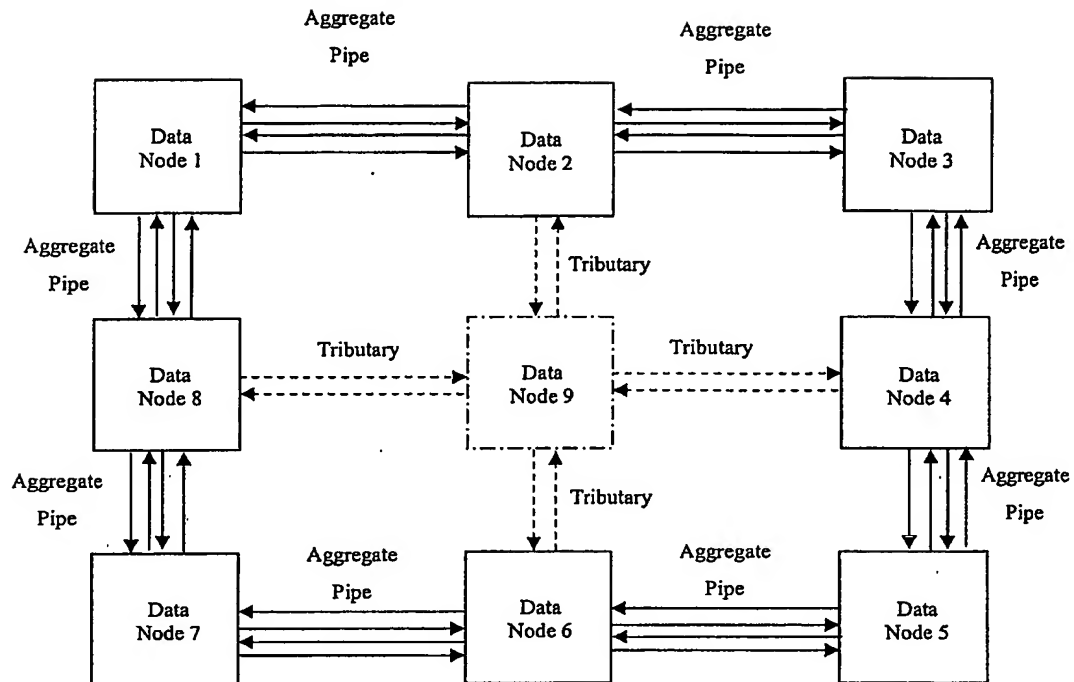


Fig. 15

A MSR Topology, Pseudo-mesh Connection

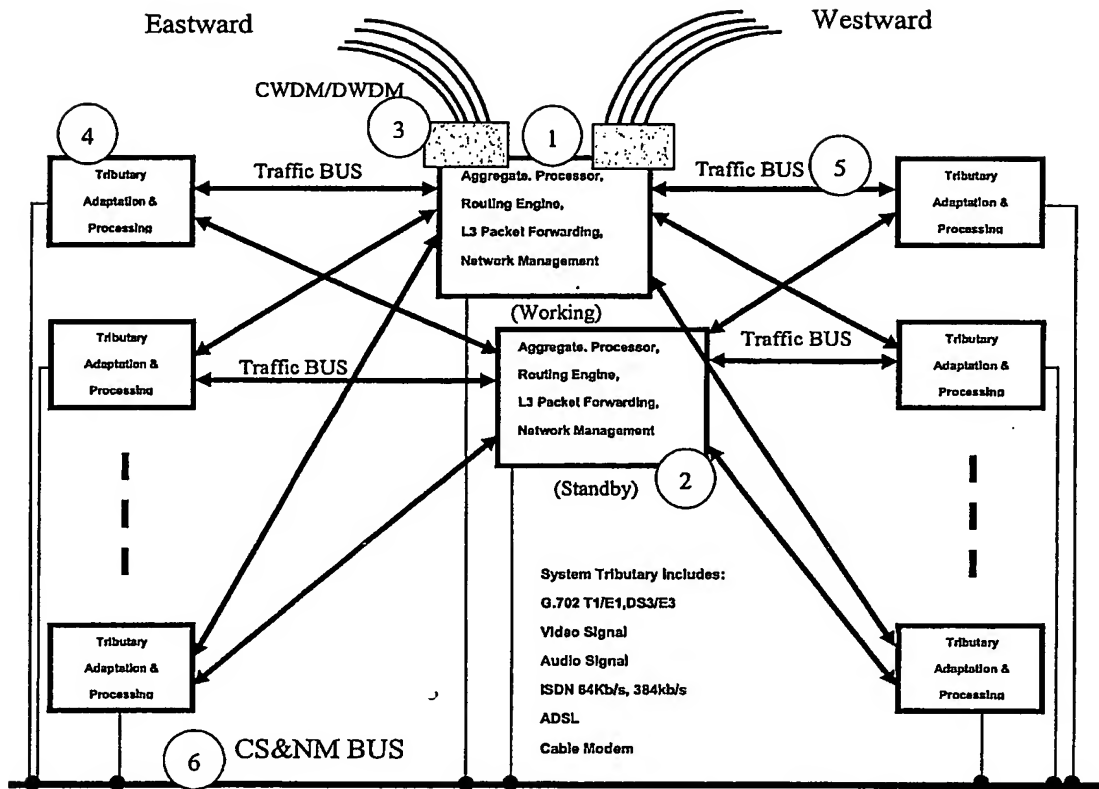


Fig. 16

The Physical Architecture of a MSR node (Out-of-band CS&amp;NM Bus)

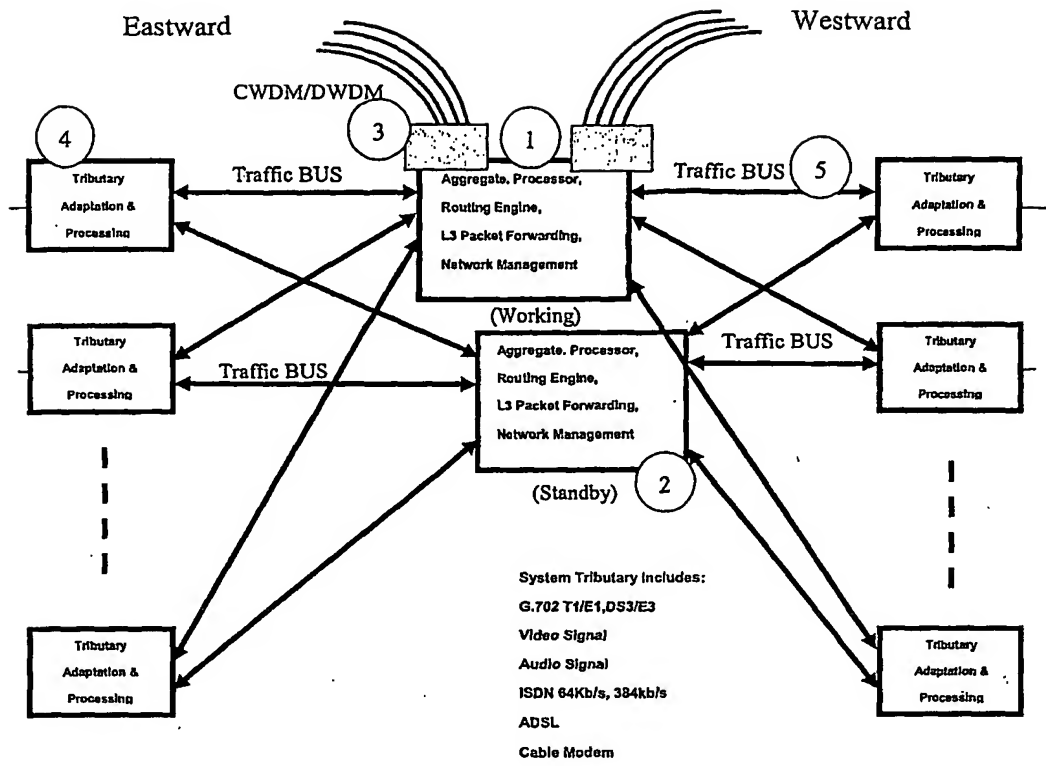


Fig. 17

The Physical Architecture of a MSR node (in-band CS&NM Bus)



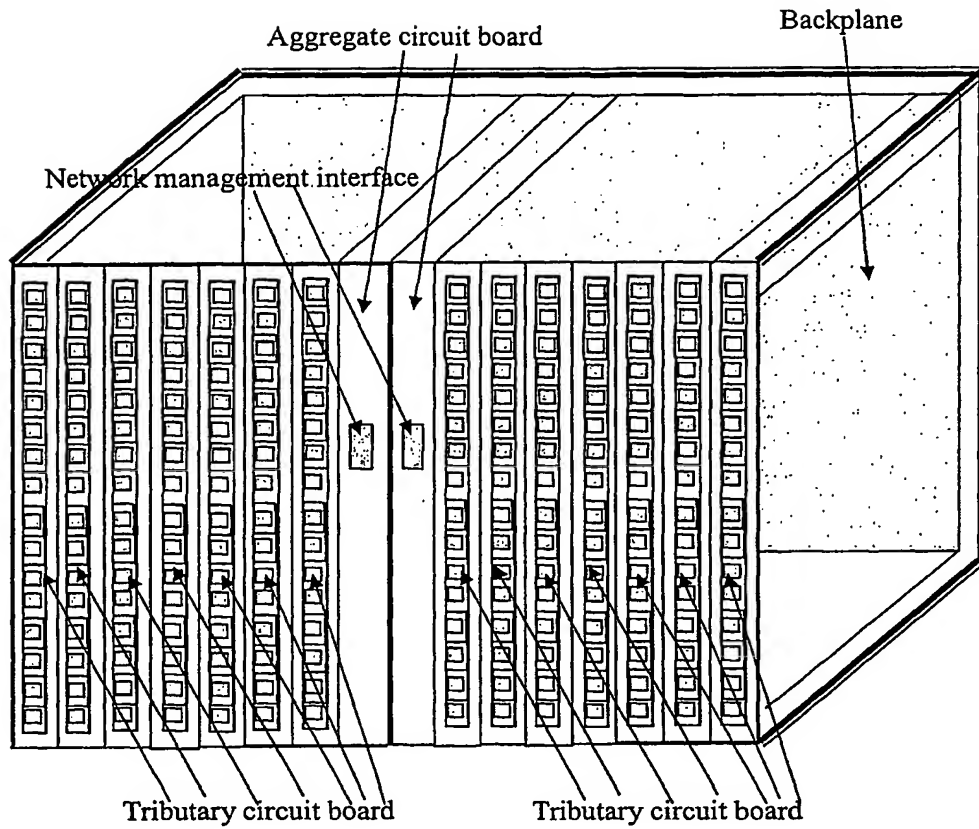


Fig. 18

Layout of system equipment of a MSR node

# INTERNATIONAL SEARCH REPORT

International application No.

PCT / CN02 / 00792

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7:H04L12 / 42, H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7:H04L12 / 28, H04B10/20

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT: 成帧器, 封装, 节点, 环, 帧, 数据分组, 链路, 信道

WPI, EPODOC, PAJ: TX FRAMER, RX FRAMER, ENCAPSULATE, NODE, DATA FRAME, MULTIPLE, SERVICE, RING, RINGLE, FORWARD, FILTER, AGGREGATE PIPE, DATA PACKET, CHANNEL

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO, A1, 9726737 (ASCOM NEXION INC), 24 JULY 1997, page3, paragraph 1 - page 14, paragraph 3, fig.1-5, abstract	1-22
A	EP, A1, 1063803 (LUCENT TECHNOLOGIES INC), 27 DECEMBER 2000, column 2, line 26 - column 11, line 11, fig.1-6, abstract	1-22
A	EP, A2, 1093266, (NORTEL NETWORKS LTD), 18 APRIL 2001, column 6, line 6- column 14, line 27, abstract	1-22

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  
23. APRIL 2003

Date of mailing of the international search report  
05 JUN 2003 (05.06.03)

Name and mailing address of the ISA/CN  
6 Xitucheng Rd., Jimen Bridge, Haidian District,  
100088 Beijing, China  
Facsimile No. 86-10-62019451

Authorized officer

Wu

Telephone No. 86-10-62093164

